# Davey & Company

Est. (b) 1885





## DAVEY & COMPANY, LONDON, Ltd.

(Established 1885)

Unit 1, Commerce Way, Whitehall Road Industrial Estate, Colchester, Essex, CO2 8HR

Tel: +44(0)1206-500945 Fax: +44(0)1206-500949 e-mail: chandlery@davey.co.uk www.davey.co.uk

### Distributors to the Trade for Traditional Yacht and Ships Fittings

All measurements and illustrations are given in good faith to, as accurately as possible, portray the product to the reader. Traditional manufacturing methods, however, do produce slight variances in form and size, therefore all information is given as a general guide. Conversion between metric and imperial are as near as possible. Specifications may be altered without notice and we recommend that no apertures are cut nor holes drilled until the item is in the hands of the fitter.

Terms of business and conditions of sale may be found in our current price list.

Marine companies wishing to open a credit account with Davey & Company should apply to us on their headed paper for an application form.





### Introduction



In February 1885 Arthur Christopher Davey began a venture that throughout the 20th century evolved into a culture in the manufacture and supply of marine equipment.

From humble beginnings in Leadenhall Street, the company soon moved to its famous address at 88, West India Dock Road, London E 14, where it successfully traded for over 100 years. As one of the UK's oldest marine companies, it is fitting that we are now based in Britain's oldest recorded town of Colchester

88 West India Dock Road London E14

Throughout our long history we have endeavoured to give good service with quality, and as yesterdays courtesies become today's traditions, we continue to serve the industry with due care and deference. This philosophy is underpinned by our position as an MOD supplier since our inception.

Within the covers of this catalogue you will find many items that have been in production throughout most of the last century, and are still produced in the same way, from the same patterns, today. Largely made in the midlands of England, we offer genuine cast bronze, brass and galvanised fittings, that do today's job, with a touch of history.

#### **CONTENTS**

	SECTION	PAGE
1.	Metals & fastenings guide	3
2.	Custom work	5
3.	Deck hardware & exterior fittings	6
4.	Rigging & sail handling	28
5.	Hot Pot stove	40
6.	Pumps	41
7.	Lighting	42
8.	Door, hatch & interior fittings	50
9.	Tools	60
10.	Signal, sound & safety	62
11.	Fastenings	63
12.	Boat care	66
13.	Index	68

### **Metals & Fastenings Guide**



At Davey & Company we specialise in the production of traditional fittings using traditional materials. This means that we try to avoid the use of stainless steel and aluminium, which are widely used on modern craft, and favour instead the bronzes, brass, copper and galvanised iron. Apart from being more pleasing to the eye, these materials offer different qualities than their modern counterparts and are perhaps these days less well understood. To help answer some of the more frequently asked questions and to support our product descriptions, the following notes are offered as guidance.

#### **CUSTOM CASTING**

See page 5 for information about how our traditional skills can be utilised to produce equipment to your design and specification.

We can also modify some of our standard fittings by, for instance, supplying without fixing holes so that they can be drilled in-situ or perhaps we have an old pattern that would suit you that is not currently in production.

#### **METALS**

#### Gunmetal

The first and most important thing to say here is that **gunmetal is bronze**, or to be more accurate, it is one of the bronzes and is a nice warm 'browny-gold' colour. Its designation is LG2 (LG stands for leaded gunmetal) and consists of copper (85%), lead (5%), tin (5%) and zinc (5%). Gunmetal is a favoured material to use for traditional boat fittings because it takes casting, machining and polishing very well, is relatively strong and very resistant to salt water, so it does it's job for a very long time. All Davey products made from gunmetal include the letters GM in the part number.

Incidentally, 'polishing', in foundry terms, just means that after the item is knocked from the sand mould with its very rough surface, it is sanded down using progressively finer abrasive and polishing belts until it has a mirror smooth and shiny finish. This surface will, on contact with sea air, slowly patinate to a pleasing darker brown colour with tinges of green, but this does not effect its strength, performance or life expectancy and is, in fact, its natural state. If a gleaming polished finish is preferred then any good metal polish can be used to keep it 'as new' and perhaps a smear of petroleum jelly will keep the polished finish longer where the function of the fitting allows.

#### **Aluminium Bronze**

For fittings which need a higher strength as well as excellent seawater resistance we use aluminium bronze, designation AB2, which is an alloy consisting of copper (83%), aluminium (10%), nickel (5%) and iron (3%). This is a paler yellow/gold colour and having more than twice the strength of gunmetal is ideal for manufacturing our 'Grabit' boathook and reefing claws. For this material our part numbers include the letters AB.

#### **Brass**

There are many alloys in use in the world today called brass, with some being better than others. As we are primarily listing brass items made in England, where the controls are quite stringent, the quality of the brass used is of a high standard. However, it should be noted that brass is best used for interior fittings and should never be used in a submerged position. Brass items contain the letters BR in the number.



### **Metals & Fastenings Guide**

#### **Chrome Plate**

Many items in this catalogue are produced and listed with a chrome plated finish (usually on top of brass), and carry the letters CP in the number. Many others that we list only in gunmetal or brass can also be chrome plated to order, and we would be pleased to quote for this service. It should be noted, however, that gravity sand cast items (which is how many of our products are made) can sometimes have small pits on the surface which all but disappear when they are finally polished in the foundry. It is possible when chrome plating these items that these blemishes can sometimes re-appear.

#### **FASTENINGS**

#### **Galvanic Corrosion Avoidance**

It is very important that the correct fastenings are used to attach each fitting to the boat. It is not enough that the fastenings themselves are of marine quality, they must also be close in the Galvanic Series to the metal the fitting is made from. If they are too dissimilar, the less noble one will corrode.

The following table shows those combinations that are suitable and those that are not. A selection of our traditional marine fastenings can be found towards to end of this catalogue.

Fitting Material	Fastenings					
	Not Suitable					
Gunmetal	Silicon Bronze or Stainless Steel	Brass				
Brass	Brass or Silicon Bronze	Stainless Steel				
Galvanised Iron	Galvanised or Stainless Steel	Silicon Bronze				

#### Silicon Bronze

This is an excellent material for the production of marine fastenings. It is high in strength and corrosion resistance and can be formed and machined into most kinds of fastenings including wood screws, machine screws, coach bolts, coach screws and nails. It is more expensive than most other materials, but this is paid back through its high strength and long life.

#### **Fastening Type**

For some of our items in this catalogue we have stated a fastening type or size as a guide in relation to normal use and method of fixing. It is recommended, however, that fittings that could take a heavy prolonged or snatch load should be bolted rather than screwed, with reinforcing pads underneath, if required, to spread the load.

#### **Custom Work**



#### **Custom Cast Work**

At Davey & Company we have a long history of design and manufacture using traditional, some may say, old fashioned ways. When developing products we invariably use pencil and paper, rather than computer programs, and 'feel' our way into the final product. Our team of specialist craftsmen, all working in the UK, use traditional manufacturing skills and processes to keep our range alive. This same team produces special equipment for projects all over the world.

From an old, possibly broken, example, we can produce a pattern and then the finished item, exactly as dictated by history, or the current owner.

Or, a simple sketch with dimensions is enough for us to give a broad quote with, perhaps, any comments about style, strength or materials.



Special Herreshoff style cleat for the UK



Miniature anchors for Holland

have experience in casting, machining and finishing a wide range of products.

Working primarily in bronze, brass and iron, we

From cleats and fairleads to portholes and miniature anchors, we are happy to assess your project and help where we can, using the same treasured and time honoured skills for which Davey & Company has been renowned for over 125 years.

We know how hard it is to find the right fittings today. Many of the old manufacturers have ceased trading over the years and replacing lost or broken parts to the same style, off the shelf, is all but impossible. At Davey & Company, we try to ease some of these problems by producing equipment that is right for the boatyard, right for the owner and, especially, right for boat.



61 x Special 12" portlights for Austria



CE

#### **Polished Bronze Portlights**

These heavy duty Davey portlights are traditionally hand made in England to the highest quality and CE approved for upper hull areas and cabin sides. Supplied with outside finishing rings they are fitted with toughened glass and have a polished finish. The 8" round opening and all three oval opening portlights have two closures for additional security. Chrome plate finish and reduced spigot lengths are available to special order. 12" opening and fixed available to special order.



#### **Round Opening**

Gunmetal	Glass		Flange		Spigot		Spigot	
	Diameter		Diameter		Diameter		Depth	
3035/GM/080	31/4"	84mm	6"	150mm	43/8"	112mm	1½"	38mm
3035/GM/100	4"	100mm	61/2"	170mm	51/4"	134mm	13/8"	34mm
3035/GM/125	5"	125mm	73/4"	195mm	53/4"	146mm	13/4"	44mm
3035/GM/150	6"	150mm	91/16"	230mm	67/8"	175mm	13/4"	44mm
3035/GM/200	8"	200mm	12"	310mm	10"	250mm	2"	52mm




#### **Round Fixed**

Gunmetal	Glass		Flange		Spigot		Spigot	
	Diameter		Diameter		Diameter		Depth	
3036/GM/100	4"	100mm	6%16"	167mm	47/8"	123mm	13/8"	35mm
3036/GM/125	5"	125mm	75/8"	195mm	53/4"	146mm	13/4 "	44mm
3036/GM/150	6"	150mm	91/16"	230mm	67/8"	175mm	13/4 "	44mm
3036/GM/200	8"	200mm	12"	310mm	10"	250mm	2"	52mm



3039

#### **Oval Opening**





#### **Oval Fixed**

	9	9	
6			
0		0	

Gunmetal	Glass Size	Flange Size	Spigot Size	Spigot
				Depth
3039/GM/168	67/8" x 4"	87/8"x 6"	7½"x 45/8"	11/4"
	175 x 100mm	225 x 150mm	192 x 117mm	32mm
3039/GM/218	8½" x 4¾"	10½" x 6¾"	93/8" x 55/8"	11/4"
	215 x 125mm	270 x 175mm	238 x 143mm	32mm
3039/GM/275	10¾" x 6"	14 <sup>1</sup> / <sub>8</sub> " x 9 <sup>1</sup> / <sub>4</sub> "	12" x 7½"	13/4"
	272 x 150mm	358 x 237mm	304 x 182mm	45mm

#### **Windscreen Fittings**

The set consists of one centre and one pair of side brackets cast in gunmetal and chrome plated. Supplied without glass.



	Centre Bracket	Side Bracket	
	Height Height		
8750/CP/222	9¾" 238mm	3½" 89mm	
8750/CP/287	12" 300mm	3½" 89mm	



**NEW** 



#### **Drip Cup**

Cast in bronze with a polished finish, this new addition to our range is designed to catch the condensation that can drip from portholes. Also available chrome plated.

Bronze	Chrome	Width	Height	Projection	
3010/GM	3010/CP	4¾" 120mm	2" 52mm	1¼" 34mm	



#### **Fly Screens**

These fly screens are manufactured from stainless steel mesh and have a flexible outer rim that holds them firmly in the bore of the portlight. As a simple push fit they are easily installed without tools and can be simply removed and stored when not required. The door remains fully usable when the fly screens are in place. There is a size to suit each Davey portlight or any other portlight with the same internal shape and size. Other sizes can be made to special order.



#### Round

Part Number	Outside Diameter / Portlight Bore.		To suit Davey Portlight
3020/SS/080	41/8"	105mm	3035/GM/080 31/4" 80mm
3020/SS/100	5"	125mm	3035/GM/100 4" 100mm
3020/SS/125	55/8"	143mm	3035/GM/125 5" 125mm
3020/SS/150	65/8"	168mm	3035/GM/150 6" 150mm
3020/SS/200	93/16"	234mm	3035/GM/200 8" 200mm



#### **Oval**

Part Number	Аррі	ox. size	To suit Davey Portlight
3030/SS/168	7¾" x 5"	195 x 125mm	3033/GM/168
3030/SS/218	9%" x 5%"	245 x 150mm	3033/GM/218
3030/SS/275	11%" x 7¼"	300 x 180mm	3033/GM/275

#### **Portlight Rings**

Cast in gunmetal with a polished finish, these flat rings are supplied as outside finishing rings with our portlights but can also be ordered separately here for use as glazing rings or other applications. Also available chrome plated or in polished stainless steel.



Round	Outside Diameter		Insid	e Diameter
3036/GM/100/OSR	6%16"	167mm	47/8"	123mm
3035/GM/100/OSR	65/8"	169mm	51/4"	134mm
3035/GM/125/OSR	73/4"	197mm	57/8"	149mm
3035/GM/150/OSR	91/4"	175mm	67/8"	175mm
3035/GM/200/OSR	12"	304mm	95/8"	243mm




Oval	Width				Height			
Ovai	Inside		Outside		Inside		Outside	
3033/GM/168/OSR	8"	203mm	93/4"	250mm	51/4"	132mm	7"	180mm
3033/GM/218/OSR	93/4"	249mm	113/4"	300mm	61/8"	155mm	81/8"	206mm
3033/GM/275/OSR	121/8"	307mm	141/4"	362mm	73/8"	186mm	93/4"	248mm
3039/GM/168/OSR	7½"	192mm	9"	230mm	45/8"	116mm	61/8"	157mm
3039/GM/218/OSR	91/16"	234mm	11"	278mm	5½"	140mm	71/4"	182mm
3039/GM/275/OSR	12"	305mm	141/8"	358mm	71/8"	182mm	91/4"	237mm

NEW




#### **Deck Lights**

From the early 1900s, Davey & Company has been producing a range of deck prisms to bring natural light down below. Manufactured in England these prisms are solid glass with either flat bronze frames, where the glass is rabetted in, or deep bronze frames for thinner decks. In both cases a marine quality black mastic should be used such as a polysulphide or synthetic rubber and to improve adhesion the glass should be abraded first where the sealant touches. Frames can be chrome plated to order or, in some cases, supplied in polished stainless steel.



#### **Rabetted Deck Prisms**

In this style the glass is set first into the deck using a marine quality mastic and then a flat frame is positioned over the rim of the glass and screwed down. This is only suitable where there is sufficient depth of wood to support the weight of anyone walking on it.



Bronze c/w Glass	Stainless Steel c/w Glass	Overall Size	Depth	Nominal Glass Size	Spare Glass
2411/GM/225	2411/SS/225	10¼" x 4¾"	21/4"	9" x 3"	2409/OO/225/075
2411/GW1/223	2411/55/225	260 x 124mm	57mm	229 x 75mm	2409/00/223/0/3
2411/GM/250	2411/SS/250	113/8" x 53/8"	21/4"	10" x 3½"	2409/OO/250/087
2411/GW1/250	2411/55/250	290 x 137mm	57mm	260 x 89mm	2409/00/250/06/
2411/GM/312	2411/SS/312	14½" x 6½"	2½"	12½" x 4½"	2409/OO/312/112
2411/GWI/312	2411/88/312	368 x 165mm	64mm	318 x 114mm	2409/00/312/112





Bronze c/w Glass	Stanless Steel c/w Glass	Overall Diameter	Depth	Glass Diameter	Spare Glass
2412/GM/162	2412/SS/162	61/8"	3/4"	43/8"	2420/OO/110
2412/GWI/102	2412/55/102	156mm	19mm	112mm	2420/00/110
2412/GM/194	2412/SS/194	73/4"	3/4"	51/2"	2420/OO/137
2412/GWI/194	2412/33/194	195mm	19mm	140mm	2420/00/137
2412/GM/250	2412/SS/250	10"	3/4"	8"	2420/OO/200
2412/GN1/250	2412/88/280	250mm	19mm	200mm	2420/00/200

2413 Melon




The melon has the greatest light output, but also the greatest depth, so care should be taken when fitting above walkways or other areas to ensure adequate headroom.

Bronze c/w Glass	Stainless Steel c/w Glass	Overall Diameter	Depth	Glass Diameter	Spare Glass
2413/GM	2413/SS	7¾" 195mm	5½" 140mm	5½" 140mm	2408



#### **Deep Frame Deck Prisms**

The style of this prism is ideal for thinner decks such as steel, aluminium or fibreglass. The frame is fixed to the deck first and the glass is then set into the frame from the top using a good quality marine mastic.





2414 Deep Frame Oblong



Gunmetal c/w Glass	Overall Size	Depth	Nominal Glass Size	Spare Glass
2414/GM/225	11" x 5"	2"	9" x 3"	2410/OO/225/075
2414/01/1/2/23	279 x 127mm	50mm	229 x 75mm	2410/00/223/073
2414/GM/250	12 <sup>1</sup> / <sub>4</sub> " x 5 <sup>3</sup> / <sub>4</sub> "	21/4"	10" x 3½"	2410/OO/250/087
2414/01/1/250	311 x 146mm	57mm	254 x 89mm	2410/00/230/00/
2414/GM/300	14½" x 6½"	21/2"	12" x 4"	2410/OO/300/100
2414/GWI/300	368 x 165mm	64mm	305 x 100mm	2410/00/300/100

2415 Deep Frame Melon



Gunmetal c/w Glass	Overall Diameter	Depth	Glass Diameter	Spare Glass
2415/GM	8½" 206mm	4½" 115mm	5½" 140mm	2407

This is a fairly recent development which allows the very popular melon prism to be more easily fitted into thinner decks.

2418 Deep Frame Round Prism



Gunmetal c/w Glass	Overall Diameter	Depth	Glass Diameter	Spare Glass
2418/GM	10" 250mm	1½6" 27mm	8" 200mm	2421/OO/200

This prism is an effective alternative for the bulls eye pattern below.

2417 Bulls Eye-Deep Frame



Gunmetal c/w Glass	Overall Diameter	Depth	Glass Diameter	Spare Glass
2417/GM/206	8½" 206mm	1¾" 45mm	6" 150mm	2416/OO/150
2417/GM/260	10¼" 260mm	2" 50mm	8" 200mm	2416/OO/200




#### **Mushroom Ventilators**

Manufactured in gunmetal, we produce low profile vents for the coach roof and higher patterns for areas that could become awash. The high patterns have a through deck spigot and inner neoprene seal for added water protection and all vents have a 'T' handle for opening and closing.



Gunmetal	Inside Diameter		Flange Diameter		Close	d Height	Fastenings
2454/GM/075	23/4"	70mm	41/8"	105mm	13/8"	35mm	No. 8
2454/GM/100	33/4"	95mm	51/2"	140mm	13/8"	35mm	No. 8
2454/GM/125	43/4"	120mm	67/8"	175mm	13/4"	45mm	No. 8



Gunmetal	Inside Diameter		Flange	Flange Diameter		ed Height	Fastenings
2453/GM/075	3"	75mm	51/2"	140mm	31/4"	82mm	No. 10
2453/GM/100	4"	100mm	63/4"	170mm	33/4"	95mm	No. 12
2453/GM/125	5"	125mm	73/4"	197mm	4"	100mm	No. 12
2453/GM/150	6"	150mm	81/2"	216mm	51/4"	133mm	No. 12



#### **Glazed Gunmetal Ventilator**

A versatile vent with two glazed segments in the top admitting both light and air to the cabin. Fitted with 'T' handle.

Gunmetal	Inside	<b>Diameter</b>	Flange Diameter		Clange Diameter   Closed Height		Fastenings
2452/GM	41/2"	114mm	7"	178mm	23/8"	60mm	No. 10



#### **Shell Ventilator**

This attractive vent is especially popular for ventilating the engine area.

Gunmetal	7	Width		Length		eight	Fastenings
2467/GM/01	43/4"	122mm	6"	150mm	25/8"	65mm	No. 8
2467/GM/02	63/8"	163mm	7½"	190mm	23/4"	70mm	No. 8



#### **Half Cowl Ventilator**

Cast from gunmetal, these vents are designed to fit to the sides of engine compartments. They are usually fitted in pairs, but are listed separately so that either port or starboard may be supplied individually.

Port	Starboard	Height	Width	Depth	Fastenings
2475/GM/LH	2475/GM/RH	51/2"	3½"	2½"	No. 4
		140mm	90mm	65mm	



#### **Cast Cowl Ventilator**

Polished brass or chrome plate with optional blanking caps.

Brass	Chrome	Internal Diameter	Height		Cowl Diameter	
5400/BR	5400/CP	2½" 63mm	4½" 115mm	85/8" 220mm	51/8" 130mm	
Blanking Caps		Brass :	5401/BR	Chrome 5401/CP		



#### **Cowl Vents - Cast Bronze**

Heavy cast bronze cowl vents with flush bronze deck plates, produced in the UK by traditional methods. The outer surface is polished and the inside a contrasting sateen finish, which is attractive in itself but also aids internal painting if required. A securing screw is fitted to allow the vent to be locked in any position and a blanking cap and key are included for when the vent is removed. Available in two sizes. They can be chrome plated to order or supplied with a matt finish.



NEW

Gunmetal	Chrome	Thread Diameter	Flange Diameter	Height	Cowl Diameter
2470/GM/075	2470/CP/075	3" 75mm	4¾" 120mm	7" 178mm	5½" 140mm
2470/GM/100	2470/CP/100	4" 100mm	6½" 165mm	10½" 266mm	8" 200mm



#### **Deck Screws - Cast Bronze**

Heavy duty cast gunmetal without spigot, polished finish. Available chrome plated to order. Supplied with key.

Gunmetal	Aperture	Diameter	Fastenings		
2430/GM/075	3" 75mm	4¾" 120mm	No. 8		
2430/GM/100	4" 100mm	6½" 165mm	No. 10		

Heavy duty cast gunmetal with BSP threaded spigot, polished finish. Available chrome plated to order. Supplied with key.

Gunmetal	BSP Thread	Dia	meter	Fastening	
2433/GM/037	1½"	35/8"	93mm	No. 8	

Larger sizes available to special order

Polished brass or chrome with integral handle in cap

Brass	Chrome	Legend	Legend Hose Size	
0710/BR/38	0710/CP/38	Water	1½" 38mm	No. 8
0711/BR/50	0711/CP/50	Diesel	2" 50mm	No. 8
0712/BR/38	0712/CP/38	Waste	1½" 38mm	No. 8

**NEW** 

#### **Brass Nameplates**



9523/BR/DIESEL	Diesel Nameplate
9523/BR/WATER	Water Nameplate



#### **Fuel Tank Vent**

Brass finish or chrome plated.

Brass	Chrome				
2435/BR	2435/CP				
For 5/8" / 16mm hose					

#### **Drain Plug**

Cast in gunmetal unpolished. Fitted with neoprene washer.



Gunmetal		Bore	Cut-	out Dia	Flange	Diameter	Hull	Thickness
1441/GM/12	1/2"	12mm	3/4"	19mm	15/8"	42mm	5/16"	8mm
1441/GM/19	3/4"	19mm	1"	25mm	2"	50mm	3/8"	10mm
1441/GM/25	1"	25mm	13/16"	30mm	21/8"	54mm	3/8"	10mm
1441/GM/32	11/4"	32mm	1½"	38mm	21/2"	65mm	3/8"	10mm



#### **Cleats**

Davey & Co. produce a wide range of bronze cleats. The items on these pages are those currently in production, but other patterns and sizes are available to special order. Please enquire if the item you need is not shown here. Most gunmetal items can be chrome plated on request.

1084 Pillar Cleat



Gunmetal	Length		Base	e Width	Fastenings	
1084/GM/062	2½"	62mm	1/2"	12mm	No	. 6 screw
1084/GM/100	4"	100mm	7/8"	22mm	3/16"	5mm
1084/GM/125	5"	125mm	1"	25mm	1/4"	6mm
1084/GM/150	6"	150mm	11/8"	28mm	1/4"	6mm
1084/GM/175	7"	175mm	11/4"	32mm	1/4"	6mm
1084/GM/200	8"	200mm	1%"	36mm	5/16"	8mm
1084/GM/250	10"	250mm	1%"	40mm	5/16"	8mm

1073 Jamb Cleat



1077 Flat Top Cleat



1078 Open Top Cleat





1089/BR/048 & 1089/BR/070



1089 Tubular Jamb Cleat



1070 Horn Cleat



1075 Tall Horn Cleat



Gunmetal	Length		Bas	se Width	Fastenings	
1073/GM/075	3"	75mm	5/8"	16mm	No. 6 screw	
1073/GM/100	41/8"	105mm	3/4"	19mm	No. 8 screw	
1073/GM/125	5"	125mm	1"	25mm	No. 10 screw	
1073/GM/150	6"	150mm	1"	25mm	No. 12 screw	
1073/GM/175	7"	175mm	1"	25mm	No. 14 screw	

Gunmetal	Length		Base	e Width	Fastenings	
1077/GM/100	4"	100mm	1½"	32mm	No. 8 screw	
1077/GM/125	5"	125mm	1%"	38mm	No. 8 screw	
1077/GM/150	5%"	150mm	1%"	40mm	No. 10 screw	

Gunmetal	Length		Base	e Width	Fastenings	
1078/GM/100	4"	100mm	7⁄8''	22mm	3/ <sub>16</sub> "	5mm
1078/GM/125	5"	125mm	1"	25mm	1/4"	6mm
1078/GM/150	6"	150mm	11/8"	28mm	1/4"	6mm
1078/GM/175	7"	175mm	1¼"	32mm	5/16"	8mm

Part No.	Length	Base Width	Max Line Size	Fastenings
1089/BR/048	1%" 48mm	¾" 19mm	6mm	No. 6 screw
1089/BR/070	2¾" 70mm	<sup>3</sup> / <sub>4</sub> " 19mm	8mm	No. 8 screw
1089/GM/LH/081	3¼" 82mm	%" 22mm	10mm	No. 8 screw
1089/GM/LH/087	3½" 89mm	%" 22mm	12mm	No. 8 screw
1089/GM/RH/081	3¼" 82mm	¾" 22mm	10mm	No. 8 screw
1089/GM/RH/087	3½" 89mm	¾" 22mm	12mm	No. 8 screw

Gunmetal	Length		Base	e Width	Fastenings
1070/GM/075	31/8"	79mm	7/8"	22mm	No. 6 screw (x2)
1070/GM/100	4"	100mm	11/8"	28mm	No. 8 screw (x2)
1070/GM/150	6"	150mm	11/4"	32mm	No. 8 screw (x4)
1075/GM/100	4"	100mm	1¾"	35mm	No. 8 screw (x2)
1075/GM/125	5"	125mm	15/8"	42mm	No. 10 screw (x2)
1075/GM/150	5¾"	148mm	2"	50mm	No. 10 screw (x4)

The 1075 pattern is much heavier duty than the 1070 pattern.



1085 Herreshoff Cleat



Herreshoff style cleat with hollow top bar. The bases are tapped to accommodate M16 studding or bolts

Part No.		Length		Base	Width	Fastenings
1085/GM/300	Gunmetal	113/4"	296mm	23/8"	32mm	M16
1085/CP/300	Chrome	113/4"	296mm	23/8"	32mm	M16

1098 Torpedo Cleat



Gunmetal	Head Length	Base Length	Base Width	Fastenings
1098/GM/087	3½" 89mm	21/8" 73mm	1¼" 32mm	No. 6 screw
1098/GM/112	4½" 114mm	43/8" 112mm	1½" 38mm	No. 8 screw
1098/CP/087	3½" 89mm	21/8" 73mm	1¼" 32mm	No. 6 screw
1098/CP/112	4½" 114mm	43/8" 112mm	1½" 38mm	No. 8 screw

1088 Bar Cleat - Bolt Through



Gunmetal	O.A. Height		<b>Base Dimensions</b>	Bolt Size
	Above Base Plate			
1088/GM/162	21/2"	64mm	6½" x 2¼"	4" x <sup>7</sup> / <sub>16</sub> "
			165mm x 57mm	100mm x 11mm
1088/GM/238	31/4"	82mm	9½" x 2½"	6" x <sup>5</sup> / <sub>8</sub> "
			241mm x 64mm	150mm x 16mm

Please note that the oval teak bar is not supplied with this item.

1099 Bar Cleat - Screw Down



Gunmetal	O.A. Height	<b>Base Dimensions</b>	Fasteners	
1099/GM	2½" 64mm	21/8" x 11/2"	<sup>3</sup> / <sub>16</sub> " 5mm	
		73mm x 38mm		

Brackets are sold singularly, therefore two need to be ordered to make one cleat.



#### **Tufnol Cleats**

Strong, lightweight and resistant to the marine environment, these genuine Tufnol cleats will give excellent service for many years.



	Туре	Length		
1092/00/150	Jamming Cleat	6"	150mm	
1093/00/200	Double Cleat	8"	200mm	
1093/00/280	Double Cleat	11"	280mm	

#### **Wooden Cleats**

In teak or varnished ash, these cleats add warmth and style to any vessel. Larger sizes up to 20" are also available to special order.

Ash

Teak

Length

Base Width



Ash	Teak	Length		Base '	Width
1097/AH/100	1097/TK/100	4"	100mm	5/8"	16mm
1097/AH/125	1097/TK/125	5"	125mm	3/4"	19mm
1097/AH/150	1097/TK/150	6"	150mm	3/4"	19mm
1097/AH/175	1097/TK/175	7"	175mm	7/8"	22mm
1097/AH/200	1097/TK/200	8"	200mm	15/16"	24mm
1097/AH/225	1097/TK/225	9"	225mm	11/16"	30mm
1097/AH/250	1097/TK/250	10"	150mm	11/4"	32mm
1097/AH/300	1097/TK/300	12"	300mm	1½"	38mm



#### **Bollard Cleats**

All bollard cleats are produced in polished bronze and can be chrome plated to order. Many can also be produced in galvanised iron in batch quantities.

1079



Gunmetal	Length		Base Dia.		Fastenings	
1079/GM/125	5"	125mm	21/2"	65mm	1/4"	6mm
1079/GM/150	6"	150mm	31/2"	90mm	1/4"	6mm
1079/GM/187	7½"	187mm	43/4"	120mm	5/16"	8mm
1079/GM/225	9"	225mm	5"	125mm	5/16"	8mm

1080



Gunmetal	I	Length Base Dia.		Bolt Size	
1080/GM/100	4"	100mm	2½" 57mm		3½" x ½"
					89mm x 11mm
1080/GM/125	5"	125mm	25/8"	67mm	4" x ½"
					100mm x 12mm
1080/GM/150	6"	150mm	2¾" 70mm		4½" x ½"
					108mm x 12mm

1081



Gunmetal	L	Length		Base Dia.		Fastenings	
1081/GM/062	21/2"	62mm	2"	50mm	No.	8 screw	
1081/GM/100	4"	100mm	23/4"	70mm	No.1	0 screw	
1081/GM/125	5"	125mm	3"	75mm	3/16"	5mm	
1081/GM/150	6"	150mm	31/4"	83mm	1/4"	6mm	

1082



Part Number		Length	Base Dia.	Bolt Size
1082/GM/150	Gunmetal	6" 150mm	3¾" 85mm	4½" x ½"
1082/CP/150	Chrome	6" 150mm	3/8 6311111	115mm x 12mm



### **Mooring Bitt**

Gunmetal	Arm Length	<b>Base Dimensions</b>	Height	Fastenings	
1150/GM	6½"	5" x 5"	41/8"	5/16"	
		125mm x 125mm	105mm	8mm	



#### **Bollards**

All bollards are produced in polished bronze and can be chrome plated to order. Many can also be produced in galvanised iron in batch quantities.

#### 1127 Raked 12"



Gunmetal	Length	Base Dimensions	Fastenings
1127/GM/300	12"	113/8" x 31/2"	3/8"
	300mm	290mm x 89mm	10mm
1127/GM/450	18"	18" x 5½"	1/2"
	457mm	457mm x 140mm	12mm

1129



A range of stylish raked bollards with a lower profile, ideal for modern classics and lighter displacement boats of all types. Can be chrome plated to order.

Gunmetal	Height	Height Base Dimensions	
1129/GM/175	17/8"	6¾" x 1¾"	1/4"
	48mm 175mm x 47mm		6mm
1129/GM/225	2½"	9" x 2½"	5/16"
	64mm	225mm x 64mm	8mm
1129/GM/300	3"	12" x 3"	5/16"
	75mm	300mm x 75mm	8mm

1126



Gunmetal	L	Length		e Width	Fastenings	
1126/GM/100	4"	100mm	11/16"	28mm	3/16"	5mm
1126/GM/150	6"	150mm	1½"	38mm	1/4"	6mm
1126/GM/200	8"	200mm	17/8"	48mm	5/16"	8mm
1126/GM/250	10"	250mm	21/4"	57mm	5/16"	8mm

1137



Gunmetal	Arm Base		Height	Fastenings
	Length	Dimensions		
1137/GM/118	45/8"	5" x 3¾"	5"	1/4"
	117mm	125mm x 95mm	125mm	6mm
1137/GM/150	61/4"	57/8" x 45/8"	7"	5/16"
	159mm	149mm x 117mm	178mm	8mm
1137/GM/187	71/2"	7" x 5½"	81/4"	3/8"
	190mm	178mm x 140mm	210mm	10mm

1086 Thames Cleat



Gunmetal	Horn Length	Horn Length Base Dimensions	
1086/GM/150	6" 150mm	5" x 1¾"	<sup>3</sup> / <sub>16</sub> " 5mm
		125mm x 45mm	
1086/GM/200	8" 200mm	7" x 21/4"	5/16" 8mm
		175mm x 56mm	

1138



Gunmetal	Length	Height	Base L x W	Fastenings
1138/GM/220	81/2"	43/8"	7" x 2¾"	1/4"
	220mm	110mm	180 x 70mm	6mm



#### **Deck Fairleads**

Davey & Company produce a wide range of fairleads cast in bronze with a polished finish. In addition to those shown here, we have other patterns available for casting to special order. These fairleads can be chrome plated on request. Some fairleads can be produced in galvanised iron in batch quantities.

1111 Straight Fairlead



1112 Handed Fairlead



#### **Straight Pattern**

Gunmetal	Length		Width		Aperture		Fastenings
1111/GM/100	4"	100mm	7/8"	22mm	13/8" x 5/8"	35 x 16mm	No. 8
1111/GM/125	5"	125mm	1"	25mm	11/8" x 3/4"	48 x 20mm	No. 10
1111/GM/150	6"	150mm	13/16"	30mm	21/4" x 15/16"	57 x 24mm	No. 12
1111/GM/175	7"	175mm	13/8"	34mm	2½" x 1"	64 x 25mm	No. 14
1111/GM/200	8"	200mm	1½"	38mm	21/8" x 11/8"	74 x 30mm	6mm
1111/GM/225	9"	228mm	1½"	38mm	31/4" x 11/4"	82 x 31mm	8mm
1111/GM/250	10"	255mm	13/4"	45mm	3¾" x 1½"	97 x 35mm	8mm
1111/GM/300	12"	300mm	21/16"	55mm	4½" x 2"	115 x 50mm	8mm

#### **Handed Pattern**

Left Hand	Right Hand	I	ength	Width Aperture		erture	Fastenings	
1112/GM/LH/100	1112/GM/RH/100	4"	100mm	3/4"	19mm	11/8" x 5/8"	28 x 16mm	No. 8
1112/GM/LH/125	1112/GM/RH/125	5"	127mm	1"	25mm	1½" x ¾"	38 x 20mm	No. 10
1112/GM/LH/150	1112/GM/RH/150	6"	150mm	11/4"	32mm	1¾" x ½"	44 x 22mm	No. 12
1112/GM/LH/200	1112/GM/RH/200	8"	203mm	1½"	37mm	2½" x 1¼"	64 x 32mm	6mm
1112/GM/LH/225	1112/GM/RH/225	9"	228mm	1½"	38mm	21/8" x 13/8"	73 x 34mm	8mm
1112/GM/LH/250	1112/GM/RH/250	10"	255mm	17/8"	48mm	31/4" x 11/2"	83 x 38mm	8mm
1112/GM/LH/300	1112/GM/RH/300	113/4"	300mm	21/8"	55mm	3¾" x 1¾"	95 x 48mm	8mm
1112/GM/LH/350	1112/GM/RH/350	14"	360mm	23/4"	70mm	4½" x 2½"	114 x 64mm	12mm

1102 Closed Fairlead



Gunmetal	Length	Base Width	Aperture	Fastenings
1102/GM/100	4" 100mm	1½" 32mm	1¾" x ½" 35mm x 15mm	No. 8
1102/GM/150	6" 150mm	1¾" 38mm	2" x ½" 50mm x 22mm	No. 10
1102/GM/200	8" 200mm	15/4 40mm	3½" x 1½6" 90mm x 28mm	No. 14

1107 Fairlead with Roller



Gunmetal	Length	Base Width	Aperture	Fastenings
1107/GM/300	12¼" 310mm	2¾" 70mm	1¾" x ¾" 115mm x 55mm	16mm
1107/GM/400	16" 405mm	3¼" 83mm	2" x %" 160mm x 70mm	18mm



1109 Straight Lipped Fairlead



Gunmetal	Length		V	Vidth	Aperture	Fastenings
1109/GM/100	4"	100mm	7/8"	22mm	13/8" x 1/2"	No. 8
					35 x 13mm	
1109/GM/150	6"	150mm	1"	25mm	2" x 1/8"	No. 8
					50 x 22mm	
1109/GM/200	8"	203mm	11/2'	' 38mm	3" x 11/8"	No. 12
					75 x 30mm	

1113 Handed Lipped Fairlead



**Left Hand** 

#### Gunmetal

Left Hand	Right Hand	Length	Width	Aperture	Fastenings
1113/GM/LH/100	1113/GM/RH/100	4"	7/8"	11/4" x 5/8"	No. 8
		100mm	22mm	32 x 16mm	
1113/GM/LH/150	1113/GM/RH/150	6"	1"	2" x 1/8"	No. 8
		150mm	25mm	50 x 22mm	
1113/GM/LH/200	1113/GM/RH/200	8"	11/4"	2½" x 1½"	No. 14
		203mm	32mm	65 x 28mm	

1115 Lock Over Handed Lipped Fairlead



**Right Hand** 

#### Gunmetal

Gunmetai					
Left Hand	Right Hand	Length	Width	Aperture	Fastenings
1115/GM/LH/100	1115/GM/RH/100	4"	7/8"	1¾" x 5/8"	No. 8
		100mm	22mm	45 x 16mm	
1115/GM/LH/150	1115/GM/RH/150	6"	11/4"	2" x 1/8"	No. 10
		150mm	32mm	50 x 22mm	
1115/GM/LH/165	1115/GM/RH/165	7"	11/4"	21/4" x 1"	No. 12
		180mm	32mm	57 x 25mm	
1115/GM/LH/200	1115/GM/RH/200	8"	1½"	2 <sup>3</sup> / <sub>4</sub> " x 1 <sup>1</sup> / <sub>8</sub> "	No. 14
		205mm	38mm	70 x 28mm	

1120 & 1121 Straight Sunken Fairlead



Gunmetal	J	Length	V	/idth	Aperture	Fastenings
1120/GM/200	8"	203mm	1"	25mm	3¾" x 1¼"	No. 12
1121/GM/200	8"	203mm	1½"	38mm	95 x 32mm	No. 14

Available in two width options.

1122 Handed Sunken Fairlead



Right	Hand


Left Hand	Right Hand	Length	Width	Aperture	Fastenings
Gunmetal	Gunmetal				
1122/GM/LH/200	1122/GM/RH/200	9"	1½"	31/8" x 11/4"	No.14

#### 1124 Semi Sunk Fairlead



Gunmetal	Length	Width	Aperture	Fastenings
1124/GM/180	71/4"	11/4"	2½" x 1½"	No.12
	184mm	31mm	54 x 34mm	

Through Bulkhead Fairlead



Gunmetal	Aperture	Overall Size	Bulwark
	Dimensions		Thickness
2639/GM/110	23/8" x 13/4"	41/4" x 31/4"	3/4"
	60mm x 45mm	108mm x 83mm	20mm
2639/GM/145	3½" x 2"	55/8" x 41/8"	11/4"
	88mm x 50mm	142mm x 105mm	32mm




#### **Bronze Sheet & Deck Leads**

A variety of polished gunmetal leads to guide sheets and control lines along decks, through coamings etc.

Part No. 9405 is based on our fitting from 1936, which we have re-introduced following requests from our customers. Supplied in polished gunmetal, this fairlead can easily be removed when not required and the gunmetal deck plate can also be used to accommodate our ash stand-up blocks on page 33.











9408

Width Internal Height Gunmetal Overall Overall Dia 1/2" 15/8" 11/2" 9401/GM 12mm 41mm 38mm 21/4" 5/8" 1" 9408/GM/016 16mm 58mm 25mm 11/4"  $2^{9/16}$ 3/4" 9408/GM/018 18 mm60mm 34mm

#### **Bronze & Lignum Vitae Sheet Leads**

Lignum Vitae bullseyes secured with phosphor bronze U-bolts or gunmetal screwdown bindings.



	Binding	Inside Eye Dia.	Dimensions L x W
9402/PB/012	1/4" 6mm Bronze U-Bolt 13/4" 44mm Long	½" 12mm	2½" x 1½" 58mm x 28mm
9402/PB/016	5/16" 8mm Bronze U-Bolt 2" 50mm Long	½" 16mm	2½" x 1¼" 64mm x 32mm
9404/GM/012	Gunmetal Screwdown	½" 12mm	21/8" x 11/4" 73mm x 32mm
9404/GM/016	Gunmetal Screwdown	<sup>5</sup> / <sub>8</sub> " 16mm	31/8" x 13/8" 79mm x 34mm

#### **Coaming Leads**

These leads, which are cast in gunmetal and then polished, are fitted with brass sheaves. Ideal for passing lines through coamings they are available in single or double format.



Gunmetal	No of	Max	Size Overall	Coaming
	Sheaves	Rope		Thickness
9415/GM/012	1	8mm	23/4" x 15/8"	1/2"
			70 x 41mm	12mm
9415/GM/016	1	10mm	37/16" x 2"	5/8"
			87 x 50mm	16mm
9416/GM/012	2	8mm	4" x 1%16"	1/2"
			100 x 40mm	12mm
9416/GM/016	2	10mm	5" x 2"	5/8"
			125 x 50mm	16mm



#### **Fender Eye Plates**

Available in square or diamond pattern, in barrelled gunmetal, polished gunmetal, chrome plate and galvanised finishes.



Square Pattern with 4 fixing holes		Eye Dia	Base Dims	Fastenings
9384/CP	Chrome Plated			
9384/GA	Galvanised Iron	3/4"	1¾" x 1½6"	4 off
9384/GM	Gunmetal	19mm	44mm x 37mm	No. 8
9384/GM/POL	Polished Gunmetal			



Diamond Pattern with 2 fixing holes		Eye Dia	Base Dims	Fastenings
9385/CP	Chrome Plated	1/2"	11/8" x 11/8"	2 off
9385/GM	Gunmetal	13mm	28mm x 28mm	2 011 No. 8
9385/GM/POL	Polished Gunmetal	1311111	20111111 X 20111111	NO. 8

#### **Lacing Hooks and Eyes**

The low profile pattern is cast in gunmetal and the standard pattern stamped in brass. Both are also available in a chrome plate finish.

**Low Profile** 





	Gunmetal	Chrome	Length	Width	Height
Hook	9502/GM	9502/CP	1¾" 45mm	5/8" 16mm	5/16" 8mm
Eye	9504/GM	9504/CP	15/8" 41mm	7/16" 11mm	3/8" 9mm

**Standard Pattern** 





	Brass	Chrome	Length	Width	Height
Eye	9507/BR	9507/CP	1¾" 45mm	%16" 13mm	½" 12mm
Hook	9508/BR	9508/CP	15/8" 41mm	5/8" 16mm	7/16" 11mm



#### **Engine Control Lever**

A simple but well proven engine control lever with an effective twist lock action. Available in polished brass or chrome plated.

Brass	Chrome	<b>Base Dimensions</b>	Height
9626/BR	9626/CP	3½" x ½"	5"
		90 x 22mm	125mm

#### **Keel or Rubbing Band**

Available in brass with feather edge rather than the thicker half round style. Supplied in full lengths only.



Brass	Width		Thickness		Length	
5081/BR/010	3/8"	10mm	1/8"	3mm	10'	3m
5081/BR/012	1/2"	12mm	1/8"	3mm	10'	3m
5081/BR/015	5/8"	15mm	3/16"	5mm	10'	3m
5081/BR/019	3/4"	20mm	3/16"	5mm	10'	3m
5081/BR/025	1"	25mm	3/16"	5mm	10'	3m





#### Forged Shackle Plates - High Load

These unique fittings in brass and manganese bronze have an extremely high strength factor, which is forged in during the manufacturing process. Ideal for use as folding pad eyes or binnacle rings, amongst many others, their non-rattle design will give years of reliable and secure service. Available in two sizes in polished finish or chrome plated.

Brass / Manganese Bronze	Chrome	Plate Size	Shackle Size	Approx. Breaking Load
1761/MB/06	1761/CP/06	13/8" x 13/4" 41 x 45mm	½" 6mm	800 kgs
1761/MB/08	1761/CP/08	23/8" x 23/8" 60 x 60mm	5/16" 8mm	1200 kgs



#### Forged Ring Bolts - High Load

Brass bolts turned from solid bar and forged manganese bronze shackles combine to provide a unique fitting designed for high loads in the marine environment. Available in two finishes and three sizes up to 2 tonnes breaking load, this range of ring bolts offers security and reliability for many applications on and around the boat.

Brass / Manganese Bronze	Chrome	Bolt Size	Shackle Size	Approx. Breaking Load
1760/MB/10	1760/CP/10	3/8" x 3" 10mm x 75mm	½" 6mm	800 kgs
1760/MB/11	1760/CP/11	<sup>7</sup> / <sub>16</sub> " x 3 <sup>1</sup> / <sub>2</sub> " 11mm x 90mm	<sup>5</sup> ⁄ <sub>16</sub> " 8mm	1200 kgs
1760/MB/12	1760/CP/12	½" x 4" 12mm x 100mm	<sup>3</sup> / <sub>8</sub> " 10mm	2000 kgs

### Binnacle Rings

Cast in brass.



<b>Stanchion</b>
Eyebolt/Tensioner

Cast brass eyes with a stainless steel stud



	Stud	Stud	Eye
	Length	Dia	Dia
1779/BR	2¾"	<sup>5</sup> / <sub>16</sub> "	<sup>11</sup> / <sub>16</sub> "
	70mm	8mm	17mm

#### **Bow Eye**

A heavy duty cast brass eye complete with stainless steel stud



	Stud	Stud	Eye
	Length	Dia	Dia
1780/BR	3"	<sup>3</sup> / <sub>8</sub> "	1"
	75mm	10mm	25mm

#### **Manganese Bronze Eyebolts**

**Base Size** 

2½" x 2"

64mm x 50mm



	Shaft Diameter	Shaft Length	Eye I.D.	
1707/MB/08	<sup>5</sup> / <sub>16</sub> " 8mm	31/8" 78mm	7/16" 11mm	
1707/MB/10	3/8" 10mm	4" 100mm	½" 12mm	
1707/MB/12	½" 12mm	4½" 115mm	½" 13mm	

#### Ringbolt

**Brass** 

8781/BR

Cast in brass and available in brass or chrome plate finish.



Brass	Chrome	Sha	ank dia	Shan	k Length	Ri	ng ID
0631/BR	0631/CP	3/8"	10mm	21/8"	55mm	11/4"	32mm
0630/BR	0630/CP	1/2"	12mm	23/4"	72mm	13/4"	45mm





#### **Bronze Threaded Deck Plates**

Cast in gunmetal with a polished finish, these versatile round plates are tapped for three sizes of metric thread, M8, M10 and M12. Ideal for when fitting is not always required or needs to be exchanged for an alternative. Suitable for any item with a metric thread or choose from one of the family of Davey items shown below. Available chromed to special order.

Part Number	Thread	Diameter x Height	Thread Depth
9420/GM/50/08	M8	50 x 22mm	15mm
9420/GM/50/10	M10	50 x 22mm	19mm
9420/GM/50/12	M12	66 x 34mm	22mm



#### **Eye Bolts - Bronze**

Three new bronze eye bolts with studs M8, M10 and M12 to suit the deck plates above.

Part Number	Stud	Inside Eye HxW	Total Eye Height
9380/GM/08	M8 x 10mm	22 x 19mm	47mm
9380/GM/10	M10 x 15mm	22 x 19mm	47mm
9380/GM/12	M12 x 20mm	28 x 24mm	58mm

#### **Ring Bolts - Forged**

These very strong ring bolts have been especially adapted to suit our deck plates. The bolts are turned from solid brass bar and shackles are forged in manganese bronze.

Part Number	Stud	Shackle Size	Approx Breaking Load
9375/MB/10	M10 x 15mm	½" 6mm	1200 kg
9375/MB/12	M12 x 20mm	3/8" 10mm	2000 kg

#### **Eye Bolts - Stainless Steel**

Three sizes of eye bolts in 316 stainless steel to suit our deck plates. Other sizes available on request.

Part Number	Stud	Eye ID	SWL
9381/SS/08	M8 x 13mm	¾" 20mm	140 kg
9381/SS/10	M10 x 15mm	1" 10mm	230 kg
9381/SS/12	M12 x 20mm	1¾" 30mm	340 kg

Removable Bronze Sheet Lead (M8)

See page 18 for details of this and other sheet leads.



#### **Stand-Up Blocks**

These blocks can be adapted to suit the deck plates above or permanently fitted.
See page 33 for detals.

**NEW** 

**NEW** 



#### Rudder Gear

We have a large selection of rudder gear, in polished gunmetal, to suit a wide range of craft from small dinghies to larger day boats and small cruisers.







#### Lightweight Rudder Gear

Available in gunmetal to suit lightweight dinghies up to about 8' long. This item is sold as a set, consisting of two transom gudgeons and two rudder pintles. The rudder pintles have an offset single strap, which can either be fitted to one side of a narrow rudder blade or within a wider one.

Gunmetal	Pintle Diameter	Length of Strap
1589/GM/WBI	<sup>5</sup> / <sub>16</sub> " 8mm	2½" 64mm

Suitable for the wider rudder, this set is still relatively lightweight and ideal for the heavier, small to medium size dinghy.

Gunmetal	Pintle	Inside Strap Length		Inside Strap
	Diameter	Gudgeon	Pintle	Width
1589/GM/MCN	5/16"	4"	21/2"	21/8"
	8mm	100mm	64mm	54mm

#### **Standard Duty Rudder Gear**

Available in cast and polished gunmetal in four sizes. Sold as a 4-part set.



Gunmetal	Pintle Diameter	Inside Str	Inside Strap Width	
	Diameter	Gudgeon	Pintle	VVIGUI
1589/GM/019	7/16"	71/4"	41/4"	3/4"
1309/GW1/019	11mm	185mm	105mm	19mm
1589/GM/025	1/2"	7"	4"	1"
1309/GWI/U23	12mm	175mm	100mm	25mm
1589/GM/044	1/2"	81/4"	5"	13/4"
1509/GWI/044	12mm	210mm	125mm	44mm
1589/GM/056	1/2"	6½"	6½"	23/16"
1309/GW1/030	12mm	165mm	165mm	56mm





#### **Heavy Duty Rudder Gear**

Cast in gunmetal for the larger day boat or small cruiser, this range has heavy duty straps and ½" pins for additional strength. The rudder gudgeon is canted by approximately 3 degrees.

Part No.	Description	Pin	tle / Hole	Bet	ween	Insid	le Strap
		Di	iameter	St	raps	L	ength
1917/GM	Rudder	1/2"	12.5mm	21/2"	65mm	4"	100mm
	pintle						
1918/GM	Rudder	1/2"	12.5mm	21/2"	65mm	6"	150mm
	gudgeon						
1919/GM	Transom	1/2"	12.5mm		-		-
	gudgeon						
1920/GM	Transom	1/2"	12.5mm		-		-
	pintle						



**NEW** 



A star on board encourages positive energy. It can make good things better and stops bad things getting worse. These stars are heavy cast and hand finished, with a centre screw hole for fixing to any suitable part of the boat. Available in three sizes in polished

finish or can be chrome plated to special order.

Part No.	Radius	Span	Thick	
9526/GM/030	11/4" 30mm	2" 52mm	55/16" 8mm	
9526/GM/040	1½" 40mm	3" 75mm	¾" 9.5mm	
9526/GM/050	2" 50mm	3¾" 95mm	7/₁6" 11mm	



#### **Tiller Fitting**

Cast in gunmetal and ready to fit an insert appropriate to your rudder stock.

Gunmetal	Between Straps	Length Overall
1909/GM	1 <sup>5</sup> / <sub>16</sub> " 35mm	8" 200mm



#### Raked

Gunmetal	Staff Dia	Base Dia	Height	Fastenings
9571/GM/019	<sup>3</sup> / <sub>4</sub> " 19mm	21/4" 58mm	2½" 65mm	4 off No. 8
9571/GM/025	1" 25mm	2½" 63mm	2¾" 70mm	4 off No. 8
9571/GM/031	1¼" 31mm	3" 75mm	2¾" 70mm	4 off No. 10
9576/GM/031	1¼" 31mm	3½" 90mm	3½" 82 mm	4 off No. 10

Note: The 9576 is a heavy duty fitting with a greater degree of rake being 30 degrees from vertical compared to the 9571 which is 20 degrees from vertical.



#### **Raked with Cleat and Button**

Gunmetal	Staff Dia	Base Dia	Height	Fastenings
9575/GM/025	1" 25mm	3" 75mm	2¾" 70mm	4 off No. 8
9575/GM/031	1¼" 31mm	3½" 90mm	31/8" 78mm	4 off No. 10
9575/GM/037	1½" 38mm	3¾" 95mm	3½" 90mm	4 off No. 10



#### **Dutch Style**

Gunmetal	Type	Base Dia	Height	Fastenings
9567/GM	Upright	11/4" 34mm	7¾" 198mm	3 off No. 8
9568/GM	Raked	1" 25mm	5¾" 145mm	3 off No. 8
9569/GM	Raked	11/4" 34mm	7¾" 198mm	3 off No. 8



#### **Boom Crutch Sockets**

Gunmetal	Chrome	Base Dims.	Inside Dims.
9591/GM	9591/CP	5¾" x 2¾" 137 x 68mm	2½" x 1" 64 x 24mm
9595/GM	9595/CP	2½" x 1¾" 63 x 34mm	2¾" x 1" 58 x 25mm

NEW







A very useful device for securing your oars to the dinghy when it is left unattended. A hole is drilled through the thwart and the clamp passes through gripping the oars under it's arms, a padlock then secures everything in place under the thwart. An optional socket is available to finish the hole neatly. Cast in bronze and polished.

Part No. 1055/GM Oar Clamp Part No. 1055/GM/SKT Optional Socket



#### **Stemhead Fitting**

Cast in gunmetal with a polished finish, this strong stemhead fitting takes the load down the front of the stem and is suitable for craft up to around 18 foot.

Gunmetal	Inside	Inside	Width	Height
	Length	Angle		Above Stem
3727/GM	6"	85 degrees	1"	15/16"
	150mm		25mm	34mm



#### **Lightweight Stemhead Fitting**

Cast in gunmetal this stemhead fitting is suitable for dinghies up to around 12 foot.

Gunmetal	Length	Front Strap	Width	
3729/GM	41/4" 110mm	2½" 60mm	<sup>3</sup> / <sub>4</sub> " 20mm	



#### **Side Fitting Stemhead Roller**

Available in polished gunmetal to suit chain from 1/4" to 3/8". The outer cheek curves inwards to help chain retention. Now supplied with axle bolt for extra security.

Gunmetal	Length	Width	Chain Size	Roller Size	Bolt Size
1108/GM/08	6½"	2"	<sup>5</sup> / <sub>16</sub> "	2" x 1½"	<sup>3</sup> / <sub>8</sub> " x 7"
	156mm	50mm	8mm	50 x 38mm	10 x 175mm
1108/GM/10	7½"	2½"	<sup>3</sup> / <sub>8</sub> "	2½" x 1¾"	½" x 8"
	183mm	62mm	10mm	62 x 44mm	12 x 200mm



#### **Centre Fitting Stemhead Roller**

Cast in gunmetal this fitting will suit a wide variety of foredecks. The base of the larger size has a small lip to the front.

Gunmetal	Roller Size	Base Length	Base Width
1125/GM/06	1¾" x 1¼"	4½" 110mm	31/8" 75mm
	45 x 32mm		
1125/GM/08	2" x 1½"	4" 100mm	3¾" 95mm
	50 x 38mm		



#### **Chain Pipes**

Gunmetal	Inter	Internal Dia		Height		ain Size
2633/GM/037	11/2"	38mm	31/4"	83mm	1/4"	6mm
2633/GM/044	13/4"	44mm	31/2"	92mm	5/16"	8mm
2633/GM/050	2"	50mm	4"	100mm	3/8"	9.5mm
2633/GM/062	21/2"	64mm	41/2"	114mm	7/16"	11mm
2633/GM/075	3"	75mm	51/4"	133mm	9/16"	14mm



#### **Rowlocks**

We have a wide variety of galvanised and gunmetal rowlocks to suit most rowing craft. All come complete with sockets, which we also list separately for ordering as spares or additions. Please note that we supply rowlocks as singles, **not** as pairs.

#### Gunmetal





1066/GM/SKT







Gunmetal rowlocks are a delightful addition to any fine rowing craft. It should be noted however that as this is a softer material it is not suitable for heavy rowing. If additional strength is required, moving up to a larger size would be worth considering.

	Jaw Width		Jaw W		Stem 1	Diameter
1066/GM/45	13/4"	45mm	7/16"	11mm		
1066/GM/50	2"	50mm	1/2"	12mm		
1040/GM	21/2"	62mm	5/8"	16mm		
1049/GM/50	2"	50mm	1/2"	12mm		

#### **Captive Rowlocks**

1050/GM	2"	50mm	1/2"	12mm

#### **Extra Sockets**

<b>Top Mount Socket</b>	Side Mount Socket	Stem	Diameter
1066/GM/SKT	1051/GM	1/2"	12mm
1040/GM/SKT	_	5/8"	16mm
_	1910/GM	1/2"	12mm

#### **Galvanised**



1051/GA



	Ja	w Width	Stem	Diameter
1042/GA/50/10	2"	50mm	3/8"	10mm
1042/GA/50/12	2"	50mm	1/2"	12mm
1042/GA/75/19	3"	75mm	3/4"	19mm

1049/GA/50/10	2"	50mm	3/8"	10mm
1049/GA/50/12	2"	50mm	1/2"	12mm
1049/GA/62/16	21/2"	62mm	5/8"	16mm

#### **Captive Rowlocks**

•				
1057/GA/50/12	2"	50mm	1/2"	12mm





**Side Mount Sockets** 

**1051/GA/10** - For 3/8" stem **1051/GA/11** - For 7/16" stem **1051/GA/12** - For ½" stem





1652

#### 1655 & 1657

#### **Bronze Stanchions**

Cast in gunmetal and with a polished finish, these tapered stanchions are 1" diameter at the base and are available in three heights. A choice of triangular upright or round recessed base is available.

Stanchions		
Gunmetal	Height	
1655/M/500	19½" 500mm	
1655/GM/625	24½" 625mm	
1655/GM/750	29½" 750mm	

#### **Bronze Stanchion Bases**

We offer 2 styles of bases in polished gunmetal to suit the 1655 stanchions.



Above deck base with arm and securing pin hole.

Height: 2½ 65mm **Part No. 1657/GM** 



Flush base with securing screw to prevent stanchion jumping out.

Diameter: 2<sup>3</sup>/<sub>4</sub> 69mm Depth: 2<sup>1</sup>/<sub>4</sub> 54mm **Part No. 1658/GM** 



Cast in one piece, this polished bronze stanchion has a round base and ball top for a single wire. The round base has 4 countersunk fixing holes.

Gunmetal	Height	Holes	Base Dims
1652/GM/457	18" 457mm	1	3" 75mm Diameter





#### Rail Hinge Cast in gunmetal and polished.

Gunmetal	To suit rail size		
8956/GM/082	3 <sup>1</sup> / <sub>4</sub> " x 1 <sup>3</sup> / <sub>4</sub> " 82mm x 44mm		
8956/GM/094	3¾" x 1½" 95mm x 38mm		

### **Boarding Ladder Set**

4 piece set in polished gunmetal with optional hinges and spare eyes.



Part No.	Item
9622/GM/SET	Complete Set
9622/GM/E	Spare Eyes
9622/BR/H	Brass Hinges

#### **Handrail Stanchions**

Cast in brass with a choice of styles. All types can be supplied chrome plated to special order.





Open	Closed	Rail Diameter	Base Dia	Height	Fastenings
1663/BR/31	1664/BR/31	11/4"	21/4"	23/4"	4 off No. 10
		32mm	58mm	70mm	
1663/BR/37	1664/BR/37	1½"	21/4"	3"	4 off No. 10
		38mm	58mm	78mm	




#### **Lighter Pattern**

Open	Closed	Rail Diameter	Base Dia	Height	Fastenings
0470/BR	0471/BR	13/16"	25/8"	23/4"	3 off No. 8
		30mm	67mm	70mm	



#### **Boathooks and Staves**

Boathook ends are cast in gunmetal with a polished finish.

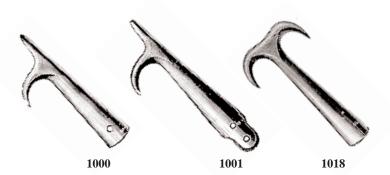

Gunmetal	Length	Stave Dia	
1000/GM	6" 150mm	1½" 32mm	
1001/GM/200	8" 200mm	1½" 38mm	
1001/GM/200	10" 250mm	1½" 38mm	
1018/GM/150	6" 150mm	1½" 32mm	
1018/GM/200	8" 200mm	1½" 38mm	



#### 'Grabit' Boathook

The original, and still the best boathook for attaching a line to a mooring buoy or ring. Cast in aluminium bronze, which is as tough as steel, one sweep with the grabit leaves the boat secure whilst a permanent mooring is attached.

	L	ength	For Stave Dia.		
1025/AB/250	10"	250mm	11/2"	38mm	

#### **Boathook Staves**

Made from the finest quality ash, one end is rounded and the other is left plain for fitting to the boathook head.

	Length	Diameter		Length	Diameter
1012/OO/1800/28	6' 1800mm	11/8" 29mm	1012/OO/3000/37	10' 3000mm	1½" 38mm
1012/OO/1800/32	6' 1800mm	1 <sup>1</sup> / <sub>4</sub> " 32mm	1012/OO/3600/37	12' 3600mm	1½" 38mm
1012/OO/2400/32	8' 2400mm	11/4" 32mm	1012/OO/4200/37	14' 4200mm	1½" 38mm
1012/OO/2400/37	8' 2400mm	1½" 38mm	1012/OO/4800/37	16' 4800mm	1½" 38mm
1012/OO/3000/32	10' 3000mm	11/4" 32mm			



#### **Boat Badge**

The finishing touch for a small dinghy or launch, this badge is sandblasted ready for painting. Traditionally, the hollow centre would frame a miniature picture of the club or owners burgee.

	Out	side Oval	Inside Oval		
9525/BR	5½" x 4½"	138mm x 110mm	3½" x 2½"	90mm x 65mm	



#### **Bronze Centreboard Winch**

Drum Diameter	83/4"	220mm
Shaft Diameter	13/16"	22mm
Base Jaw Width	21/8"	72mm
Base Jaw Length	61/4"	158mm
Power Advantage	10:1	

Part No. 3769/GM






#### **Wykeham Martin Furling Gear**

In continuous production for over 100 years, this traditional furling gear has been successfully fitted to thousands of boats worldwide. Cast in bronze from the original patterns, the parts are carefully machined, polished and assembled by English craftsmen to produce a beautiful and efficient furling system. Fitted with stainless steel thrust races to ensure free running and easy sail furling. An information leaflet is available on request. Service kits available.


Dimensions in mm's

Top Swivel	Drum	Size	App	Approx.		В	C	D	E
			Sail Area						
			sq. ft	sq. m					
9443/GM/01/TS	9443/GM/01/DR	1	50	5	72	10	eye	85	62
9443/GM/2B/TS	9443/GM/2B/DR	2B	100	10	100	18	11	128	85
9443/GM/3B/TS	9443/GM/3B/DR	3B	200	20	110	20	12	135	95
9443/GM/4B/TS	9443/GM/4B/DR	4B	350	35	150	28	16	165	150



#### **Highfields Pattern Running Backstay Lever**





Lever	Size No	Wire	Lever Length		Lever Length		Bas	se Size
2655/GM/01	1	6mm	10"	250mm	3¾" x 1¾"	95 x 35mm		
2655/GM/02	2	8mm	16"	406mm	5" x 1¾"	125 x 46mm		
2655/GM/03	3	10mm	23½"	597mm	7 <sup>3</sup> / <sub>4</sub> " x 2 <sup>5</sup> / <sub>8</sub> "	196 x 67mm		

#### **Sliding Gooseneck**



This all brass dinghy fitting consists of a spike on a gooseneck with tangs and thumb screw for adjustment. Supplied with 12" (300mm) of brass internal track, size %" (16mm).

Part No. 3401/BR

#### Halfband & Spike

Available in gunmetal.



Gunmetal	Jaw	width
3402/GM/050	2"	50mm
3402/GM/062	21/2"	62mm
3402/GM/075	3"	75mm
3402/GM/087	3½"	87mm



#### **Traditional Ash Mast Hoops**

Copper riveted ash hoops, finished with two coats of linseed oil. Bolted style also available in the same size range.

Part Number	Base Dia
0960/AH/150	6" 150mm
0960/AH/175	7" 175mm
0960/AH/200	8" 200mm
0960/AH/225	9" 225mm
0960/AH/250	10" 250mm
0960/AH/300	12" 300mm



Tack

Clew





#### **Boom Fittings**

Tack and clew fittings cast in gunmetal. The clew fitting has a double swivel tang, and the tack has a square hole for use with roller reefing.

Part No	Description	Diameter	
9446/GM/T/050	Tack Boom End Fitting	2"	50mm
9446/GM/C/050	Clew Boom End Fitting	2"	50mm



#### **Bronze Reefing Claw**

Cast in aluminium bronze, which is a very tough alloy, this product is particularly suited to its purpose, being very stiff and strong yet without excessive bulk.

Part No	Inside Diameter		
9447/AB/100	4"	100 mm	
9447/AB/125	5"	125 mm	



#### **Parrel Beads**

Turned from Ash and treated with Linseed Oil.

Part No.	Length x	Length x Diameter			
0924/00/022	7⁄8" x 7∕8"	22 x 22mm	6mm		
0924/00/035	13/8" x 11/8"	35 x 28mm	8mm		
0924/00/044	1¾" x 1¾"	44 x 35mm	10mm		
0924/00/050	2"x 15/8"	50 x 42mm	12mm		
0924/00/070	2¾" x 2¾16"	70 x 55mm	18mm		

#### **Bronze Shroud and Bowsprit Plates**

To ensure correct positioning of the plates to the vessel, these products are now supplied undrilled, thus allowing the fitter to drill fixing holes that correspond to the boats strong points.



Gunmetal	Type	Lengt	th Overall
9471/GM/075	Shroud plate	3"	75mm
9471/GM/100	Shroud plate	4"	100mm
9471/GM/150	Shroud plate	6"	150mm
9471/GM/200	Shroud plate	8"	200mm
9471/GM/250	Shroud plate	10"	250mm
9471/GM/300	Shroud plate	12"	300mm
9471/GM/400	Shroud plate	16"	400mm
9472/GM/100	Bowsprit plate	4"	100mm
9472/GM/150	Bowsprit plate	6" 150mm	
9472/GM/200	Bowsprit plate	8" 200mn	
9472/GM/250	Bowsprit plate	10" 250mm	
9472/GM/300	Bowsprit plate	12"	300mm

#### **Mast Bands**

Cast in gunmetal, they are available with either two or four eyes.



Gunmetal	No of	Inter	rnal dia.
	Eyes		
3416/GM/038	2	1½"	38mm
3416/GM/050	2	2"	50mm
3416/GM/062	2	21/2"	62mm
3416/GM/075	2	3"	75mm
3416/GM/087	2	31/2"	87mm
3416/GM/100	2	4"	100mm
3418/GM/050	4	2"	50mm
3418/GM/062	4	21/2"	62mm
3418/GM/075	4	3"	75mm
3418/GM/087	4	31/2"	87mm
3418/GM/100	4	4"	100mm





#### **Gaff Span Shackles**

Available in gunmetal.

Gunmetal	Jaw Width		Pin Diameter		Length	
1227/GM/06	1/4"	6mm	5/16"	8mm	2"	50mm
1227/GM/10	3/8"	10mm	3/8"	10mm	21/2"	64mm
1227/GM/12	1/2"	12mm	7/ <sub>16</sub> "	11mm	27/8"	75mm
1227/GM/16	5/8"	16mm	1/2"	12mm	35/8"	93mm



#### **Stamped Brass Snap Shackles**

Fixed Eye	Length		s.w.l.	Swivel Eye	Length		s.w.l.
			kg				kg
3435/MB/031	11/4"	32mm	100	3439/MB/057	21/4"	57mm	180
3435/MB/041	15/8"	41mm	150	3439/MB/069	23/4"	70mm	300
3435/MB/050	2"	50mm	250	3439/MB/081	31/4"	81mm	400
3435/MB/062	21/2"	62mm	350	3439/MB/100	4"	100mm	480
3435/MB/075	3"	75mm	500	3439/MB/137	51/2"	139mm	1000
3435/MB/100	4"	100mm	1000	-	-	-	-



#### **Manganese Bronze Shackles**

Dee	Approx Break	Harp	Approx Break	Pin Dia	Shackle
	Strain		Strain		Dia.
1219/MB/03	400kg	-	-	3mm	3mm
1219/MB/04	500kg	-	-	4mm	4mm
1219/MB/05	600kg	1218/MB/05	400kg	5mm	5mm
1219/MB/06	1000kg	1218/MB/06	800kg	6mm	6mm
1219/MB/08	1600kg	1218/MB/08	1200kg	8mm	8mm
1219/MB/10	2400kg	1218/MB/10	1600kg	10mm	10mm



#### **Pelican Hook**


Cast in gunmetal and polished. 4" (100mm) long overall.

Part No. 1390/GM



#### **Belaying Pins**

Available in gunmetal, brass and turned ash.

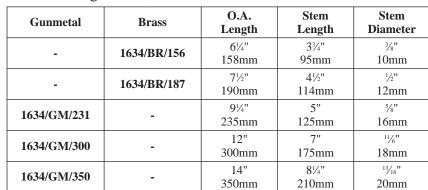






Ash	O.A. Length		Ash O.A. Length Stem Len		1 Length	Length Stem Dia	
1636/AH/280/25	11"	280mm	61/2"	165mm	15/16"	24mm	
1636/AH/360/29	14½"	365mm	83/4"	223mm	11/8"	29mm	
1636/AH/500/32	20"	500mm	12"	305mm	11/4"	32mm	



#### Track and Slides

Our track is extruded from brass and supplied in undrilled lengths of approx. 3 mtrs (10 foot). The slides are formed from brass sheet or cast in gunmetal and polished.

#### **Internal Track and Slides**



Brass	Nominal Size (a)		b	c	d	e
1321/BR/T/16	5/8"	16mm	3.25mm	8mm	21mm	9mm
1321/BR/T/19	3/4"	19mm	3.5mm	8mm	25mm	13.5mm
1321/BR/T/25	1"	25mm	5.5mm	12mm	31mm	12.5mm





Brass	Size	
1320/BR/S/16	5/8"	16mm
1320/BR/S/19	3/4"	19mm






Gunmetal	Size	
1321/GM/S/19	3/4"	19mm
1321/GM/S/25	1"	25mm



Brass	Size	
1296/BR/T/16	5/8"	16mm
1296/BR/T/19	3/4"	19mm







Brass	Size	
1296/BR/S/16	5/8"	16mm
1296/BR/S/19	3/4"	19mm



#### **Hatch Slides**

Our ¾" brass tracks, **1296/BR/T/19** and **1321/BR/T/19**, mate perfectly together to provide secure, smooth running hatch sliding gear.



#### **Sliding Decklead**

Cast in gunmetal with a polished finish, this decklead fits the 1" (25mm) internal track. and has a knurled thumb screw to secure it at any point of its travel.

Part No. 3446/GM/025



#### Spinnaker Pole Slide

Cast in gunmetal with a polished finish, this spinnaker pole slide fits the 1" (25mm) internal track. A knurled thumb screw locks it at the desired position.

Part No. 3443/GM/025



#### **Spinnaker Pole End**

Polished gunmetal end socket to fit to a wooden spar. Sprung piston end.

Gunmetal	Str	ap Length	Spar 1	Diameter
3422/GM/100	4"	100mm	13/4"	45mm
3422/GM/125	5"	125mm	21/4"	58mm



#### **Davey Ash Blocks**

Inspired by our 1928 range, we have carefully developed these blocks to have the right proportions for the efficient use with ropes from 8mm to 14mm. They are strong, simple and functional but at the same time have the beauty and elegance to enhance the finest of craft.

#### **Key Features**

• Bindings: Heavy gauge stainless steel - internal. Fixed and swivel head.

• Sheaves: Tufnol type material as standard, aluminium bronze as an option.

• Bearings: Plain on oversized SS spindles to spread the load and ensure smooth running.

• Shell: High quality ash, formed into a smooth oval shape and varnished.

• Maintenance: By removing just one machine screw the block can easily be disassembled for

inspection and maintenance without damaging the wooden shell.

• Appearance: Just beautiful!

#### **Sizing Table**

Shell	Length	Rope Size	<b>Sheave Diameter</b>	SWL Kg
3"	75mm	8 - 10	40	1500
3½"	88mm	10 - 12	50	1750
4"	100mm	12 - 14	60	2000









Block Type	3'' 75mm	3½" 88mm	4" 100mm
Single	0610/AH/075	0610/AH/088	0610/AH/100
Single & Becket	0611/AH/075	0611/AH/088	0611/AH/100
Double	0612/AH/075	0612/AH/088	0612/AH/100
Double & Becket	0613/AH/075	0613/AH/088	0613/AH/100

Note: Triple blocks are also available to special order



#### Fiddle Blocks with Fixed Eye

Block Type	7" 175mm	8'' 206mm
	10 - 12mm Rope	12 - 14mm Rope
Without Becket	0614/AH/175	0614/AH/206
With Becket	0615/AH/075	0615/AH/206



#### **Strop Blocks**

Block Type	3'' 75mm	3½" 88mm	4'' 100mm
Single	0617/AH/075	0617/AH/088	0617/AH/100







Block Type	3" 75mm	3½" 88mm	4'' 100mm
Single	0620/AH/075	0620/AH/088	0620/AH/100
Single & Becket	0621/AH/075	0621/AH/088	0621/AH/100
Double	0622/AH/075	0622/AH/088	0622/AH/100
Double & Becket	0623/AH/075	0623/AH/088	-



#### **Single Stand-up Blocks**

These blocks consist of a swivel block together with a stainless steel eyebolt and spring assembly

	3'' 75mm	3½" 88mm	4'' 100mm
Eye Bolt Size	M8 x 60mm	M8 x 60mm	M10 x 60mm
Single	0624/AH/075	0624/AH/088	0624/AH/100



#### **Stand-up Kits - Stainless Steel**

These kits, comprising of an eye bolt, 2 pressure plates and a spring, can be ordered to convert any of out swivel ash blocks to stand up.

For Block Size	3'' 75mm	3½" 88mm	4" 100mm
Eye Bolt Size	M8 x 60mm	M8 x 60mm	M10 x 60mm
Part Number	0625/SS/075	0625/SS/088	0625/SS/100



#### Tackle Hooks - Stainless Steel 316

Useful and versatile hooks with many applications on board. Available in 3 sizes. 8mm, 10mm and 12mm.

Part Number	Nominal Size	Overall Length	Eye ID	
1395/SS/08	8mm	31/8" 81mm	%16" 14mm	
1395/SS/10	10mm	41/4" 110mm	<sup>3</sup> / <sub>4</sub> " 20mm	
1395/SS/12	12mm	5½" 135mm	1" 25mm	



#### **Sheaves Only**

Sheaves are available separately as spares in the normal tufnol type material and also in aluminium bronze for upgrading or other uses. Tufnol sheaves with bronze bushes are also available to special order.

Size Dia. x Width x Bore	Tufnol Type Sheave	Aluminium Bronze Sheave
40 x 12 x 10	0619/OO/040	0619/AB/040
50 x 14 x 12	0619/OO/050	0619/AB/050
60 x 16 x 12	0619/OO/060	0619/AB/060

All the blocks in this range are available in teak to special order - minimum quantities will apply.




#### **Large Ash Blocks**

Built to the same high standard, and similar construction method, as our smaller ash blocks but with larger ash shells in relation to the rope size, for use with larger craft. The high strength is derived from the heavy gauge stainless steel bindings and oversized spindles, on which the hard wearing ertalon sheaves run smoothly. The blocks are supplied varnished and suit ropes up to 26mm.

Single Block & Becket











	Shell	Rope Size	Sheave size	SWL
	Length	mm	mm	Kg
0651/AH/160	65/16" 162mm	16 - 18	90	4600
0651/AH/200	7¾" 197mm	20 - 22	112	6000
0651/AH/225	8 <sup>3</sup> / <sub>4</sub> " 224mm	24 - 26	146	6750
<b>Double Block</b>				


**SWL** 

Kg

8850

12350

13500







Double Block & Becket							
	Shell	Rope Size	Sheave size	SWL			
	Length	mm	mm	$\mathbf{K}\mathbf{g}$			
0653/AH/160	6 <sup>5</sup> / <sub>16</sub> " 162mm	16 - 18	90	8850			
0653/AH/200	7¾" 197mm	20 - 22	112	12350			
0653/AH/225	8¾" 224mm	24 - 26	146	13500			

Triple Block				
	Shell Rope Size Sheave size		Sheave size	SWL
	Length	mm	mm	Kg
0654/AH/160	65/16" 162mm	16 - 18	90	8250
0654/AH/200	7¾" 197mm	20 - 22	112	10750
0654/AH/225	8¾" 224mm	24 - 26	146	13250

Triple Block & Becket								
	Shell	Rope Size	Sheave size	SWL				
	Length	mm	mm	Kg				
0655/AH/160	65/16" 162mm	16 - 18	90	8250				
0655/AH/200	7¾" 197mm	20 - 22	112	10750				
0655/AH/225	8¾" 224mm	24 - 26	146	13250				

Also available to special order Snatch and Swivel Blocks for rope sizes 16-26mm.









#### **Wooden Blocks with Roller Bearings**

Manufactured in ash or teak with stainless steel bindings, these blocks have brass sheaves with roller bearings. Also available in larger sizes for ropes up to 20mm.



#### **Single Block**

Teak	Ash	Rope Size	Shell Sheave Size		Breaking
			Length		Load daN
0580/TK/060	0580/AH/060	10mm	60mm	30 x 12mm	1000
0580/TK/070	0580/AH/070	12mm	70mm	35 x 14mm	1300
0580/TK/080	0580/AH/080	14mm	80mm	40 x 16mm	2000
0580/TK/105	0580/AH/105	18mm	105mm	55 x 20mm	2200
0580/TK/120	0580/AH/120	20mm	120mm	65 x 22mm	2500



#### Single Block and Becket

	Teak	Ash	Rope Size	Shell	Sheave Size	Breaking
				Length		Load daN
	0581/TK/060	0581/AH/060	10mm	60mm	30 x 12mm	1000
	0581/TK/070	0581/AH/070	12mm	70mm	35 x 14mm	1300
Ī	0581/TK/080	0581/AH/080	14mm	80mm	40 x 16mm	2000



#### **Double Block**

Teak	Ash	Rope Size	Shell	Sheave Size	Breaking
			Length		Load daN
0582/TK/060	0582/AH/060	10mm	60mm	30 x 12mm	1000
0582/TK/070	0582/AH/070	12mm	70mm	35 x 14mm	2000
0582/TK/080	0582/AH/080	14mm	80mm	40 x 16mm	2000



#### **Double Block and Becket**

Teak	Ash	Rope Size	Shell	Shell Sheave Size	
			Length		Load daN
0583/TK/060	0583/AH/060	10mm	60mm	30 x 12mm	1000
0583/TK/070	0583/AH/070	12mm	70mm	35 x 14mm	2000
0583/TK/080	0583/AH/080	14mm	80mm	40 x 16mm	2000



#### **Bronze Blocks**

Traditional all metal block with a polished cast bronze shell and eye fitted with a turned brass sheave.

Without	With	Rope Size	Sheave		Shell	
Becket	Becket		Diameter		Length	
0500/GM/037	-	6mm	7/8"	22mm	1½"	38mm
0500/GM/050	0501/GM/050	8mm	11/4"	32mm	2"	50mm



# **Tufnol Type Plastic Laminated Blocks**

These traditional laminated plastic blocks are both strong in use and competitively priced. They incorporate a strong AISI 304 stainless steel frame and brass bush bearings, and all breaking loads have been certified by Germanischer Lloyd in Hamburg. (1 daN equals approximately 1 kilo). Larger blocks up to 22mm are also available to special order.





# Single Block with Bow

Part No.	Rope Dia	Sheave Dia	Breaking	s.w.l.
			Load daN	daN
4300/00/10	10mm	30mm	880	440
4300/00/12	12mm	35mm	1120	560
4300/00/14	14mm	50mm	2010	1005
4300/00/16	16mm	63mm	2210	1105



### **Single Block with Eye**

Part No.	Rope Dia	Sheave Dia	Breaking	s.w.l.
			Load daN	daN
4305/00/10	10mm	30mm	800	400
4305/00/12	12mm	35mm	1110	555
4305/00/14	14mm	50mm	2000	1000
4305/00/16	16mm	63mm	2190	1095



### **Single Block with Swivel**

Part No.	Rope Dia	Sheave Dia	Breaking	s.w.l.
			Load daN	daN
4310/00/10	10mm	30mm	810	405
4310/00/12	12mm	35mm	1110	555
4310/00/14	14mm	50mm	2050	1025
4310/00/16	16mm	63mm	2140	1070



#### Single Block with Bow and Becket

0				
Part No.	Rope Dia	Sheave Dia	Breaking	s.w.l.
			Load daN	daN
4315/00/10	10mm	30mm	820	410
4315/00/12	12mm	35mm	1250	625
4315/00/14	14mm	50mm	2210	1105
4315/00/16	16mm	63mm	2800	1400





## Single Block with Eye and Becket

Part No.	Rope Dia	Sheave Dia	Breaking	s.w.l.
1 411 110.	корс Біа	Sheave Dia	Load daN	daN
4320/00/10	10mm	30mm	820	410
4320/00/12	12mm	35mm	1250	625
4320/00/14	14mm	50mm	2210	1105
4320/00/16	16mm	63mm	2800	1400



#### Single Block with Swivel and Becket

~ <b>g</b> =				
Part No.	Rope Dia	Sheave Dia	Breaking	s.w.l.
			Load daN	daN
4325/0010	10mm	30mm	830	415
4325/00/12	12mm	35mm	1350	675
4325/00/14	14mm	50mm	2020	1010
4325/00/16	16mm	63mm	2200	1100










# **Double Block with Bow**

Part No.	Rope Dia	Sheave Dia	Breaking	s.w.l.
			Load daN	daN
4330/00/10	10mm	30mm	600	300
4330/00/12	12mm	35mm	900	450
4330/00/14	14mm	50mm	1720	860
4330/00/16	16mm	63mm	2000	1000



Part No.	Rope Dia	Sheave Dia	Breaking	s.w.l.
			Load daN	daN
4335/00/10	10mm	30mm	630	315
4335/00/12	12mm	35mm	960	480
4335/00/14	14mm	50mm	1740	870
4335/00/16	16mm	63mm	2030	1015







Part No.	Rope Dia	Sheave Dia	Breaking	s.w.l.
			Load daN	daN
4340/00/10	10mm	30mm	610	305
4340/00/12	12mm	35mm	910	455
4340/00/14	14mm	50mm	1700	850
4340/00/16	16mm	63mm	2040	1020



# **Double Block with Swivel and Becket**

Part No.	Rope Dia	Sheave Dia	Breaking	s.w.l.	
			Load daN	daN	
4345/00/10	10mm	30mm	630	315	
4345/00/12	12mm	35mm	970	485	
4345/00/14	14mm	50mm	1710	855	
4345/00/16	16mm	63mm	2010	1005	
	With Cam Cleat				
4370/00/16	16mm	63mm	2170	1085	



### **Fiddle Blocks**

Part No.	Rope Dia	Sheave Dia	Breaking	s.w.l.		
	_		Load daN	daN		
		With Bow				
4350/00/10	10mm	42mm & 20mm	760	380		
4350/00/12	12mm	48mm & 25mm	1370	685		
		With Eye				
4355/00/10	10mm	42mm & 20mm	710	355		
4355/00/12	12mm	48mm & 25mm	1200	600		
		With Swivel				
4360/00/10	10mm	42mm & 20mm	720	360		
4360/00/12	12mm	48mm & 25mm	1200	600		
	With Swivel, Becket and Cam Cleat					
4365/00/10	10mm	42mm & 20mm	740	370		
4365/00/12	12mm	48mm & 25mm	1210	605		

### **Cheek Block**

Part No.	Rope Dia	Sheave Dia	Breaking	s.w.l.
			Load daN	daN
4395/00/10	10mm	30mm	600	300
4395/00/12	12mm	35mm	860	430
4395/00/14	14mm	50mm	1500	750
4395/00/16	16mm	63mm	1810	905







# **Tufnol Snubbing Winch**

Part No.	Base Dia	Height
4460/00/75	3"	3"
	75mm	75mm





**Cam Cleat** 

Part No.	Rope Dia	Base Size	
4450/00/10	8-10mm	76 x 35mm	
4450/00/14	12-14mm	105 x 45mm	

**Cam Cleat with Lead** 

Part No.	Rope Dia	Base Size
4455/00/10	8 - 10mm	80 x 45mm

Flag Line Block

Part No.	Rope Dia	Sheave Dia
4611/00/8	5mm	20mm



# Single Wire Rope Block

Part No.	Wire Dia	Sheave Dia	Breaking	s.w.l.
			Load daN	daN
4405/00/04	4mm	60mm	1130	565
4405/00/05	5mm	75mm	1200	600
4405/00/06	6mm	90mm	2040	1020
4405/00/08	8mm	100mm	2010	1005



# **Rope Sheave**

-				
Part No.	Rope Dia	Sheave Dia	Sheave	Bore
			Width	
4470/00/25	10mm	25mm	11mm	6mm
4470/00/30	10mm	30mm	11mm	6mm
4470/00/35	10mm	35mm	11mm	6mm
4470/00/40	10mm	40mm	11mm	6mm
4470/00/50	12mm	50mm	13mm	8mm
4470/00/60	12mm	60mm	13mm	8mm
4470/00/70	14mm	70mm	16mm	10mm
4470/00/80	14mm	80mm	16mm	10mm
4470/00/90	16mm	90mm	18mm	10mm
4470/00/100	16mm	100mm	18mm	10mm



# Wire Rope Sheave

Part No.	Wire Dia	Sheave Dia	Sheave	Bore
			Width	
4475/00/25	4mm	25mm	9mm	6mm
4475/00/30	4mm	30mm	9mm	6mm
4475/00/35	4mm	35mm	9mm	6mm
4475/00/40	4mm	40mm	9mm	6mm
4475/00/50	5mm	50mm	11mm	8mm
4475/00/60	5mm	60mm	60mm 11mm	
4475/00/70	6.5mm	70mm	13mm	10mm
4475/00/80	6.5mm	80mm	13mm	10mm
4475/00/90	8mm	90mm	15mm	10mm
4475/00/100	8mm	100mm	15mm	10mm



## **Large Tufnol Type Blocks**

Manufactured to the same high standard as the smaller range, these extremely strong blocks are suitable for ropes sizes 13mm to 22mm. They are internally bound with stainless steel and come in four configurations to suit most applications. Approved by Germanischer Lloyd in Hamburg.



Single	SWL	Single	SWL	Rope	Sheave
with Bow	daN	with Swivel	daN	Diameter	Diameter
4410/OO/13	905	-		13mm	75mm
4410/OO/16	2075	4430/OO/16	1845	16mm	90mm
4410/OO/20	2260	4430/OO/20	2435	20mm	100mm
4410/OO/22	3155	4430/OO/22	3290	22mm	120mm



Single with Bow & Becket	SWL daN	Single with Swivel & Becket	SWL daN	Rope Diameter	Sheave Diameter
4415/OO/13	980	-		13mm	75mm
4415/OO/16	2105	4435/OO/16	1850	16mm	90mm
4415/OO/20	2340	4435/OO/20	2415	20mm	100mm
4415/OO/22	3210	4435/OO/22	3290	22mm	120mm



Double with Bow	SWL daN	Double with Swivel	SWL daN	Rope Diameter	Sheave Diameter
4420/OO/13	1100	-		13mm	75mm
4420/OO/16	2400	4440/OO/16	2105	16mm	90mm
4420/OO/20	2585	4440/OO/20	2555	20mm	100mm
4420/OO/22	3155	4440/OO/22	3300	22mm	120mm



Double with Bow & Becket	SWL daN	Double with Swivel & Becket	SWL daN	Rope Diameter	Sheave Diameter
4425/OO/13	1005	-		13mm	75mm
4425/OO/16	2400	4445/OO/16	2105	16mm	90mm
4425/OO/20	2600	4445/OO/20	2555	20mm	100mm
4425/OO/22	3210	4445/OO/22	3265	22mm	120mm

### **Heavy Duty Stainless Steel Blocks**

An extremly robust range of stainless steel blocks with brass bushed tufnol type sheaves. Designed for high loads and harsh conditions, these blocks come with swivel heads and beckets as standard and are available for both rope and wire rope. As used by the Danish Navy.



# **Blocks for Rope**


Single	Breaking Load daN	Double	Breaking Load daN	Rope Diameter	Sheave Diameter
4800/SS/12	4210	4850/SS/12	4210	12mm	50mm
4800/SS/14	4210	4850/SS/14	4210	14mm	63mm
4800/SS/16	7160	4850/SS/16	7090	16mm	80mm
4800/SS/18	10750	4850/SS/18	10750	18mm	100mm



#### **Blocks for Wire**

Single	Breaking Load daN	Double	Breaking Load daN	Wire Diameter	Sheave Diameter
4805/SS/05	4210	4855/SS/05	4210	5mm	50mm
4805/SS/06	4210	4855/SS/06	4210	6mm	63mm
4805/SS/08	7160	4855/SS/08	7090	8mm	80mm
4805/SS/10	10750	4855/SS/10	10750	10mm	100mm

# **Hot Pot Stove**



#### **Hot Pot Stove**

A slimline solid fuel cabin heater designed for boats up to around 30 feet (10 metres). Solidly made in the UK from cast iron and finished black with either brass or chrome fitments. It is supplied complete with two internal grids, ash pan and handle. Can be easily installed using the wide range of stainless steel fittings on this page.

#### **Key Features**

- Cast iron construction for good heat radiation.
- Infinite air intake control to adjust heat.
- Positive front door lock for security.
- Slim body with small footprint.
- Will burn most solid fuels (not charcoal).
- Stainless steel installation fittings available.
- Safe and secure.

**3126/BR** Stove with brass fitments

**3126/CP** Stove with chrome fitments

#### **Stainless Steel Flue System**

This range of acid resistant stainless steel pipes and fittings are ideal for installing the Hot Pot stove. All parts push fit together and are compatible for a 70mm installation.



Flue Pipe

Available in four lengths

3130/SS/0200 Length 200mm 3130/SS/0330 Length 330mm 3130/SS/0500 Length 500mm

**3130/SS/1000** Length 1 metre



Flue Hood

Compact round shape which is rain proof whilst producing a good draft. Fits securely on to the deck flange.

Height: 240mm (9½") Top Diameter: 130mm (5")

3133/SS



**Elbow** 

Available in two angles.

	3131/SS/45	3131/SS/90
Angle	45°	90°
Length mm's	165 + 165	185 + 185



Flue Guard

Stainless steel guard to minimise the risk of contact burns but still allowing heat to radiate from the flue. Also available in brass or copper.

**3134/SS/0500** Length 500mm **3134/SS/1000** Length 1 metre



**Deck Flange** 

Available straight or with a choice of three angles to suit the deck camber. All deck flanges have a 160mm overall diameter.

3132/SS Straight 3132/SS/03 Angle 3° 3132/SS/06 Angle 6° 3132/SS/09 Angle 9°



**Flue Cap**To cap flue when hood

is removed. 3135/SS

# **Pumps**





#### **Plunger Galley Pump**

A practical and stylish double action galley pump with swivelling faucet and brass knob. High quality build and with service kits available for long life and optimum performance. Suitable for fresh or salt water. Barrel diameter 1" (25mm) with connection for pipe ½" - ½" (13-16mm). Available polished brass or chrome plated.

Brass	Chrome	Strokes per Litre	<b>Above Counter</b>	<b>Below Counter</b>
2593/BR	2593/CP	13	5" 127mm	9½" 241mm

Service Kit: 2593/SK



#### Plunger Galley Pump - High Capacity

A high quality, very reliable pump with a higher capacity 1½" (29mm) barrel. With a greater reach and height, this is a very practical double barrel action pump. Fitted polished brass knob and connection for pipe ½"-½" (13-16mm). For fresh or salt water. Available polished brass or chrome plated.

Brass	Chrome	Strokes per Litre	<b>Above Counter</b>	<b>Below Counter</b>
2594/BR	2594/CP	11	5¾" 146mm	6¾" 171mm

Service Kit: 2594/SK



# **Lever Galley Pump**

High quality traditional design lever pump in polished brass or chrome plated. Large 1½" (41mm) barrel with connection for ½"-¾" (13-19mm) pipe. For fresh or salt water.

Brass	Chrome	Strokes per Litre	<b>Above Counter</b>	<b>Below Counter</b>
2596/BR	2596/CP	12	8½" 216mm	3" 76mm

Service Kit: 2596/SK



# **Swivelling Faucet**

High quality all brass construction for use with hand or foot pump. Pipe connection ½"-%" (13-16mm).

Available polished brass or chrome plated.

Brass	Chrome	Above Counter	Below Counter
2599/BR	2599/CP	4¾" 120mm	2" 50mm

Service Kit: 2599/SK



# **Brass Bilge Pumps**

Available in two sizes, these solid brass bilge pumps are of traditional design and offer a pumping capacity up to 40 litres per minute. Supplied complete with two bulkhead straps. Polished finish.

Part Number	Length	Barrel Diameter	<b>Hose Connection</b>	Litres per min.
2600/BR/09	12" 310mm	1¼" 35mm	¾" 19mm	9
2600/BR/40	17½" 450mm	2½" 63mm	1¼" 32mm	40



Please note that all lights have either warm white LED's fitted or recommended LED's to be ordered separately. All LED's operate from 10 to 30 volts DC, except Eyelid Light. See light descriptions and page 48 for full LED listings.



#### **Oval Eyelid Light**

**NEW** 

This classically styled, surface mounted, light is manufactured in polished brass and fitted with a frosted lens. Supplied with a 70 lumen LED strip as standard, additional length can be ordered to double the light output. Available in 12v and 24v, these are ideal for berth, step or walkway lighting wherever unobtrusive lighting is required.

	Brass	Chrome	Dimensions	Projection
12v	7605/BR/12	7605/CP/12	5¾" x 3¾"	15%"
24v	7605/BR/24	7605/CP/24	148mm x 100mm	40mm
LED Strip	7605/LED/12	7605/LED/24	50mm long x	15mm wide



#### **Recessed Square Berth Light - with switch**

Polished cast brass and fitted with a frosted glass and switch. This recessed pattern requires a depth of 1" (25mm). Fitted with 2 warm white 60 lumen LED's as standard.

Brass	Chrome	Height	Width	Projection
7614/BR	7614/CP	5½" x 5"	5¼" x 4½" x 1"	1½"
/014/DK	/014/CF	140 x 125mm	134 x 105 x 25mm	38mm



### **Recessed Square Berth Light - without switch**

**NEW** 

For remote switching, especially when 2 or more lights are fitted in a cabin, this popular light is now available without switch. Polished brass front with frosted glass. Fitted with 2 warm white 60 lumen LED's as standard.

Brass	Chrome	Height	Width	Projection
7615/BR	7615/CP	5½" x 5" 140 x 125mm	5¼" x 4½" x 1" 134 x 105 x 25mm	1½" 38mm



#### **Teardrop Berth Light**

Polished cast brass and fitted with a frosted dome glass and switch, this unique light is fitted with a warm white 60 lumen LED's as standard.

Brass	Chrome	Height	Width	Projection
7246/BR	7246/CP	5¾" 145mm	3" 75mm	2" 50mm



#### **Brass Bracket Light (without switch)**

This graceful light is cast in brass with a polished finish and supplied with a frosted bell glass and SBC (BA15d) bulb holder. Will accept our 60 lumen warm white LED 6001/12/60 see page 48.

Height with glass 4.1/4" (108mm). Projection 3.1/2" (89mm)

Part No. 7215/BR Brass

Part No. 7215/CP Chrome



#### **Brass Bracket Light (with switch)**

A switched version of the light above. Polished cast brass and supplied with a frosted bell glass, SBC (BA15d) bulb holder and toggle switch. Will accept our 60 lumen warm white LED 6001/12/60 see page 48.

Height with glass 5" (125mm). Projection 5" (125mm).

Part No. 0396/BR Brass

Part No. 0396/CP Chrome



### Deck Head Lights - 'Jelly Mould'

These high quality period lights are now available in a variety of versions that can be mixed throughout the boat for maximum practicality and uniformity. Utilising the same genuine frosted glass, the heavy cast brass housing can be supplied with or without switch and in a choice of finishes. Suitable for many kinds of traditional craft.

- With or without switch
- Polished brass, chrome or nickel plate
- Full back case or low profile
- Fitted LED's 12v 30v as standard
- Red/White option for night vision





#### Without switch

Deep cast brass base that can be surface mounted or recessed up to the bezel level. Fitted warm white LED 165 lm.

Brass	Chrome	Overall Diameter	Projection
0391/BR	0391/CP	6¾" 170mm	31/4" 58mm



#### With switch

Deep cast brass base as above with switch fitted on the side. Fitted warm white LED 165 lm.

Brass	Chrome	Overall Diameter	Projection
0392/BR	0392/CP	6¾" 170mm	31/4" 58mm



#### **Night Vision** (with switch)

This light is the same construction as the switched 0392 above, but comes fitted with a red/white LED. When first switched on it always displays the red light first to preserve your night vision. If white light is required, simply turn off and on again and the white light will come on. No special wiring is required.

Brass	Chrome	Overall Diameter	Projection
0392/BR/RW	0392/CP/RW	6¾" 170mm	3½" 58mm



#### **Low Profile** (without switch)

This low profile version is ideal for when headroom is restricted as it has a projection of only 1½" (40mm), which is ¾" (18mm) less than the standard light. To achieve this a flat stainless steel base is utilised which is concealed by the same brass bezel and glass as above.

-		-				) II D:	
rinea	waiiii	willte	103	Ш	. INO	SWITCH.	

Brass	Chrome	Overall Diameter	Projection
0393/BR	0393/CP	6¾" 170mm	3½" 58mm







#### **Art Deco Interior Lights**

Two styles of attractive period lights with genuine moonstone glass. The 0330 has a chrome back plate and the 7502 has a front silver trim. Both are fitted with 2 warm white LED's  $(1 \times 210 \text{ lm})$  and  $1 \times 60 \text{ lm})$  to give a pleasing even light.

Part No.	Length	Width	Projection		
0330	8½" 210mm	3%" 95mm	2½" 60mm		
7502	8½" 215mm	2½" 73mm	2%" 66mm		



### Weatherproof Guarded Light

This traditional light is of all brass construction with a polished finish. The strong guard screws onto a seal in the base and protects the clear glass. Suggested LED  $6001/12/60\ 60\ lm$ .

Part No. Length		Flange Diameter	Bulb Holder
7203/BR/M/CL	4½" 105mm	31/16" 80mm	SBC



### Weatherproof Guarded Light (bulkhead fitting)

Similar to the above, this light is of all brass construction with a 90 degree bracket for fixing to a bulkhead. Suggested LED 6001/12/60 60 lm.

Part No.	O.A. Length	Projection	Bulb Holder
7207/BR/M/CL	6½" 165mm	3½" 85mm	SBC



#### Weatherproof Guarded Bulkhead Light

Cast in brass with traditionally wired hinged door secured with three brass swing bolts with wing nuts on to a rubber seal. Polished outer surface and fitted with clear glass, SBC bulb holder and brass cable gland. This is a deluxe, hand made light of unique character. Suggested LED 6001/12/60.

Brass	Brass Body Diameter		Projection	
7425/BR	4½" 114mm	6" 150mm	2½" 64mm	



# **Bulkhead Light - Powder Coated**

Cast in aluminium and fitted with an SBC buld holder, cable gland and front seal. Powder coated either white with clear glass and brass gland or matt black with frosted glass and chrome gland. Suggested LED 6001/12/60.

White with Clear Glass	Black with Frosted Glass	<b>Body Diameter</b>		O.A.Diameter		Projection	
7425/AL/WH	7425/AL/BK	4½"	114mm	5½"	140mm	23/4"	70mm



## Mast Light - New Style

**NEW** 

A new development of this classic light now means that it can be wired directly to 110/220v AC. Ideal for larger vessels where mains voltage is often installed or for smaller boats linked to shore power. Also suitable for pontoons and shore side lighting, avoiding the need to fit a transformer.

12v/24v DC supply versions available as before.

Cast in bronze with a choice of finishes or in anodised aluminium. The base of the light is angled up 10 degrees to aid the throw of light and a hinged glazed door with a seal is fitted. Back gasket also included. Rated IPX5



#### Mast Light - 110/220v AC

Available rear wired only with a GU10 lamp holder included, which offers the opportunity of selecting from a wide range of LED's in terms of angle and strength of light. This makes it possible to fit the correct LED taking into account the height the light is mounted from the surface to be lit and the spread and light brightness required.

Part No.	Material	Height	Width	Projection
0760/AL/AN	Anodised Aluminium			
0760/GM/PO	Bronze/Polished	51/4"	3"	31/4"
0760/GM/SD	Bronze/Sand Blasted	135mm	75mm	81mm
0760/CP	Chrome on Bronze			



# Mast Light - 12v/24v DC

Available for wiring through a top water tight gland or through the back, this light is supplied with a G4 lamp holder for low voltage LED's of varying degrees of spread and brightness.

With Gland	Rear Wired	Material	Height	Width	Projection
0761/AL/AN/TOP	0761/AL/AN	Anodised Aluminium			
0761/GM/PO/TOP	0761/GM/PO	Bronze/ Polished	51/4"	3"	31/4"
0761/GM/SD/TOP	0761/GM/SD	Bronze/ Sand Blasted	135mm	75mm	81mm
0761/CP/TOP	0761/CP	Chromed Bronze			



#### **Step Light**

Recessed step or bulkhead light with heavy ribbed glass and polished cast brass guard. Also available in chrome. Fitted SBC bulb holder which can accept our 60 lm LED 6001/12/60. Projection only 1" (25mm).

Brass	Chrome	Height Width		Projection	
7576/BR	7576/CP	5½" 140mm	4¾" 111mm	1½" 38mm	











# **Lamp Wick**Supplied by the metre.



### **Brass Gimbal Lamp**

Manufactured from brass, which is then polished and lacquered and fitted with a burner with 1" wide wick. The weighted font holds 350ml of fuel and will keep the lamp burning for approximately 24 hours. Complete with smoke shade and arm. Overall Height: 9½" (240mm). Projection: 6¼" (160mm).

Part No. 0308/BR

### Globe Lamp

Constructed of solid brass in traditional style. The glass globe is 7" (175mm) in diameter and the round burner gives an even bright light. The oil reservoir holds 250ml and will burn for approximately 35 hours.

Part No. 0191/BR

### **Dietz Hurricane Lamps**

The original deck, cabin or emergency oil lamp. One version is made of tinned and lacquered steel and is a very inexpensive lamp for all vessels for general purpose or emergency use. This lamp is also available in all brass construction for longer life and higher quality. Oil container 210ml. Burn time approx 11 hours. Flat wick ½" (12.5mm).

Part No. 0234 Tinned steel

Part No. 0234/BR Brass

### **Spare Glasses**

We can supply spare glasses for many of the lights we sell. Please select from the table below by lamp number.

Part Number	To suit light	
0041/CL	7203/BR/M & 7207/BR/M	
0044/FR	7426 teardrop berth light	
0234/GL	0234 hurricane lamp	
0308/GL	0308/BR gimbal lamp	
0390/OO/GLASS	0391, 0392 & 0393 jelly mould lights	
0445	0396 & 7215 bracket lights	
0760/OO/GL/CL	0760 mast lights	
7425/GL/CL	7425 bulkhead lights (brass & aluminium)	
7614/OO/GL	7614 recessed berth light	

Part Number	W	<sup>7</sup> idth
0096/00/06	1/4"	6mm
0096/00/10	3/8"	10mm
0096/00/12	1/2"	12mm
0096/00/16	5/8"	16mm
0096/00/19	3/4"	19mm
0096/00/25	1"	25mm
0096/00/27	11/8"	27mm
0096/00/32	11/4"	32mm





# **Navigation Lights - Oil**

Traditionally made oil lights in unlacquered copper with brass fitments. They will run on paraffin or lamp oil and will complement any traditional craft. Fitted with 4" (100mm) dioptric lens.

Part Number	Lamp	Overall Height
0151/CO/100/PO	Port	
0151/CO/100/ST	Starboard	9½" 240mm
0152/CO/100	Masthead	24011111
0157/CO/100	Stern	
0158/CO/100	Anchor	9¾" 248mm

### **Navigation Lights - Electric**

A selection of traditional electric navigation lights in gunmetal or brass.



#### **Miniature Navigation Lights**

Cast in gunmetal with a polished finish and also available chrome plated. These electric navigation lights have a plain lens and SBC bulb holder. Available in masthead and stern.

Gunmetal	Chrome	Type	Dimensions	
			O.A. Heigl	nt x Diameter
9733/GM	9733/CP	Masthead	51/4" x 3"	133 x 75mm
9734/GM	9734/CP	Stern		



# **Brass Navigation Lights**

This range of cast brass navigation lights are approved by the Italian RINA for boats up to 12 metres. They are supplied complete with 12v 18w bulbs and are available brass or chrome finish.

Brass	Chrome Plated	Type	Height	Width	Projection
0111/BR/P	0111/CP/P	Port			
0111/BR/S	0111/CP/S	Starboard	31/2"	23/4"	23/16"
0112/BR	0112/CP	Masthead	90mm	70mm	62mm
0113/BR	0113/CP	Stern			





#### **Switches**

Flush switch rated at 2 amps. Optional back plate  $1\frac{1}{2}$ " x 2" in brass or chrome.

Brass	Chrome	Туре
0260/BR	0260/CP	With back plate
0362/BR	0362/CP	Without back plate



### Replacement LED's

All LED's listed here are warm white to preserve as much as possible the integrity of our traditional lights. They all work on a voltage range from 10 volts to 30 volts and offer a significant power saving over standard filament and halogen bulbs and are often interchangable with them. Other variations are available on request.



Part No.	Сар Туре	LED's	Lumens	Power Draw Watts	Body Dims mm's
6000/12/60	G4	12	60	0.6	20 long 8.2 dia.

As fitted to our lights 7246, 7614, 0330 and 7502



Part No.	Сар Туре	LED's	Lumens	Power Draw Watts	Body Dims mm's
6000/18/210	G4	18	210	1.8	23 long 20 dia.

As fitted to our lights 0330 and 7502



Part No.	Сар Туре	LED's	Lumens	Power Draw Watts	Dims mm's
6001/12/60	SBC	12	60	0.6	48 LOA 25 glass dia.

Suitable for our lights 0396, 7215, 7203, 7207, 7425 and 7576.

They will also suit any lamp with an SBC bulb holder.



Part No.	Сар Туре	LED's	Lumens	Power Draw Watts	Dims mm's
6001/15/105	SBC	15	105	1.4	42 LOA 15 cap dia.

A brighter alternative to the one above. Will fit any SBC bulb holder.



Part No.	Сар Туре	LED's	Lumens	Power Draw Watts	Dims mm's
6002/10/165	G4	10	165	2.2	40 dia.

As fitted to our lights 0391, 0392, and 0393.

The pins are 90 degrees from the centre back.



Part No.	Сар Туре	LED's	Lumens	Power Draw Watts	Dims mm's
6002/15/190/RW	G4	12 white 3 red	190	2.4	44 dia.

A special unit which always lights red when first switched on but when turned off and on again will light warm white. Ideal for preserving night vision.

The pins are 90 degrees from the centre back.



Part No.	Сар Туре	LED's	Lumens	Power Draw Watts	Dims mm's	
6005/18/560	G4	18	560	7.0	49 dia.	

Suitable for our 0761 mast light as a low wattage alternative to halogen.

# delite<sup>®</sup>

# Lighting



**Delite of Denmark,** incorporating E S Sorensen, produce a wide selection of lamps, instruments and accessories, all of which are available through Davey & Company. A selection is shown below and a full catalogue is available on request or on-line at *www.delite.dk* 



### Sampanino

A simple and practical oil lamp, made in stainless steel and incorporating a heat shield, shade and carrying loop. This is a go anywhere, use anywhere lamp. Fitted with a Perko burner on a 325ml reservoir.

Height: 330mm Burn Time: 20 hours

ES/650801



### Ship's Lamps

Historic and elegant, these lamps are beautifully made and available in brass or chrome.

Height: 350mm Burn Time: 9 hours.

ES/500221 Brass ES/500202 Chrome



#### **Passenger Lamp**

This non-gimballing brass oil lamp was often to be found in 19th century trains and ships.

Height: 340mm Burn Time: 9 hours

Dating from 1750, this unusual and interesting instrument can indicate weather changes up to two days in advance. A version of this device was used on the

ES/500101





Smoke Bell

A small brass shade that clips on to any oil lamp chimney. Brass.

ES/100600



# Galileiglass

Height: 140mm

ES/550401 Brass

ES/550404 Polished SS ES/550405 Brushed SS

**Stormglass** 

A novel way to check the temperature at a glance. Tags hanging from the balls show the relevant temperature.

Supplied complete with mount.

'Beagle' with Darwin in 1831. Supplied complete with mount.

Height: 140mm
ES/550701 Brass
ES/550704 Polished SS
ES/550705 Brushed SS



A classic Scandinavian design to bring light and elegance to any table. Stainless Steel.


Height: 230mm Burn time: 15 hours ES/650302 Polished ES/650303 Brushed











door opening outwards.



RIGHT HAND LOCK With reversed bolt for door opening outwards.

# Sea Blue Security Locks

# NEW

#### 10 Year Guarantee

Sea Blue Security locks have been developed in the lock capital of England to withstand both corrosion and physical attack. Heavy steel full casings are used for strength with drab olive high chromate electro protection, as used on military equipment and vehicles where exposure to corrosion is a high factor. The whole case is then powder coated and packed with life long heavy grease that will not thin or dry out. Each set is built with high quality brass shoots, followers and forend plates to complement our range of furniture. Stanless steel forend and striker plates also available.



#### **Mortice Lock - 5 lever**

High level security lock with 5 internal levers. The latchbolt is reversible to suit left or right opening doors with a follower to suit furniture with standard 8mm square spindles. The deadbolt has two hardened steel rollers.

Supplied with striker plate and two keys.

Forend Plate	6" x ¾"	152 x 20mm
Lock Case	4¼" x 2½" x ½"	108 x 63 x 15mm
3500/BR	Brass forend	
3500/SS	Stainless Steel forend	



#### **Toilet Lock**

Utilising the same high quality case as above, this toilet door lock operates using furniture with 8mm spindles and toilet door turn & release furniture with 5mm spindles, as shown on page 51, to lock. The latchbolt is reversible to suit left or right opening doors.

Supplied with striker plate.

Forend Plate	6" x ¾"	152 x 20mm
Lock Case	4¼" x 2½" x ½"	108 x 63 x 15mm
3501/BR	Brass forend	
3501/SS	Stainless Steel forend	



#### **Mortice Latch**

For operation using furniture with 8mm spindles, this reliable latch is perfect for internal doors that do not need locking. Supplied with striker plate.

Forend Plate	4" x ¾"	102 x 20mm
Lock Case	2¾" x 2½" x ½"	61 x 63 x 15mm
3502/BR	Brass forend	
3502/SS	Stainless Steel forend	



#### **Rim Locks**

Traditional cast brass construction with polished cases and keepers. They have a two lever action with bronze springs and the latchbolt is reversible on the larger size.



Left Hand	Right Hand	Height		Width	
3522/BR/062/LH	3522/BR/062/RH	5"	125mm	21/2"	62mm
3523/BR/125/LH	3523/BR/125/RH	43/8"	111mm	5"	125mm

#### **Traditional Furniture**

This range is supplied as knob & knob or ring and knob for both rim and mortice locks. The knob is  $1\frac{3}{4}$ " (44mm) in diameter and the ring is 2" (50mm). All sets come complete with round roses, escutcheons with covers and  $\frac{5}{16}$ " (8mm) spindles.



Brass	Furniture Type	Lock Type
9200/BR/M	Knob & Ring	Mortice
9200/BR/R	Knob & Ring	Rim
9203/BR/M	Knob & Knob	Mortice
9203/BR/R	Knob & Knob	Rim

#### Oval Knob & Ring

A smaller set than the above with a  $1\frac{3}{4}$ " (44mm) oval knob and  $1\frac{1}{2}$ " (38mm) ring. Manufactured from high quality cast brass components with a polished finish. All sets come complete with round roses, escutcheons with covers and  $\frac{5}{16}$ " (8mm) spindles.



Brass	Lock Type
9205/BR/M	Mortice
9205/BR/R	Rim

#### **Die Cast Brass Furniture**

A range of furniture in die cast brass with 5/16" (8mm) spindles, ideally suited to the 3474 & 3476 style of locks. Stamped brass rose is an optional extra. Also available in chrome plated finish.



Brass	Furniture Type	Sizes	
3477/BR	Oval Knob & Ring	Knob: 2"	50mm
3478/BR	Oval Knob & Knob*	Ring: 13/8"	35mm
3485/BR	Lever	Lever: 3"	75mm
3482/BR	Rose	Rose: 13/4"	45mm

<sup>\*</sup> Not pictured



#### **Turn & Release Toilet Door Furniture**

We offer two styles of toilet door furniture to suit our lock 3501. Both cast brass with a polished finish, there is an oval turn with plain rose or a curved turn with raised edge rose. Supplied with a 5mm spindle and external emergency release. Also available chrome plated.

Brass	Chrome	Overall Diameter	Projection
3510/BR	3510/CP	1¾" 35mm	1½" 28mm
3511/BR	3511/CP	1¾" 35mm	1¼" 30mm











# **Toggle Fasteners**

Die cast in brass in three patterns. Natural finish or chrome plated.

Brass	Chrome	Overall Size		Pattern
3085/BR	3085/CP	2%" x 1%" 72 x 35mm		Vertical to Vertical
3086/BR	3086/CP	3" x 1¼" 75 x 32mm		Vertical to Horizontal
3107/BR	3107/CP	4¼" x 1%"	110 x 48mm	Vertical to Vertical for Padlock



#### **Anti-Rattle Fastener**

The cam mounted arm increases pressure as it moves across the plate, stopping any closure from rattling. Manufactured in brass and available natural or chrome plated.

Brass	Chrome	Arm Plate Dimensions	Striking Plate Length		
8155/BR	8155/CP	1" x 1% 25 x 33mm	3" 75mm		



#### **Turn Buttons**

Buttons only available in brass, buttons on plates in brass and chrome.

Buttons		<b>Buttons on Plates</b>				
Brass	Length		Brass	Brass Chrome Diar		ameter
8150/BR/037	1½"	38mm	8151/BR/044	8151/CP/044	13/4"	44mm
8150/BR/050	2"	50mm	8151/BR/050	8151/CP/050	2"	50mm



#### **Automatic Button**

A gravity operated locker catch which simply swings to one side to allow opening. Cast in brass, and complete with screw bush, it is available in polished finish or chrome plated.

Brass	Chrome	V	Vidth
8154/BR	8154/CP	11/4"	31mm



#### **Double Ball Catch**

Brass with steel balls.

Brass	Length x Width	
8483/BR/049	115/16" x 3/8"	
	49 x 10mm	



#### **Locker Catch**

Spring loaded rocking catch and keeper in die cast brass.

Brass	Plate Length	
3091/BR	11/4" 32mm	



#### **Push Button Catch**

Manufactured in brass and available polished or chrome plated. Supplied complete with striking plate. Maximum door thickness 1" (25mm).

Brass	Chrome	Latch Dimensions		Knob Diameter	
3092/BR	3092/CP	1½" x ¾"	38 x 20mm	13/16"	30m



# **Cupboard Latch**

Brass construction. Available in left and right hand. (Left hand illustrated).

Brass	Hand	Size
3114/BR/LH	Left	31/4" x 1"
3114/BR/RH	Right	80 x 25mm



## Oval Knob & Spindle

Brass knob to suit 3114 latch.

Part No. 3853/BR



# Spindle & Rose

Brass operating spindle to suit 3114 latch.

Part No. 3852/BR



# Box Key

Brass key to operate 3852 spindle.

**Part No. 1612** 























# **Swallow Tail Hasp & Staple**

Cast brass and polished this fitting was first made by us over 100 years ago.

Length: 8½" 216mm. Width across tail: 4¾" 120mm

Part No. 8951/BR/220

### **Hasp & Staple**

Heavy duty cast brass and polished, these hasps & staples should not be confused with standard pressed or lightweight die castings.

Brass	Length	Width
8995/BR/075	3" 75mm	1" 25mm
8995/BR/094	3¾" 95mm	1¾6" 30mm
8995/BR/112	4½" 114mm	1¾6" 30mm
8995/BR/150	6¼" 158mm	1½" 30mm

### Mini Hasp

Brass	Chrome	Length	Width
4107/BR	4107/CP	21/8" 55mm	2" 50mm

# **Turn Button Hasps**

Brass	Length	Width	
8930/BR/075	3" 75mm	1 <sup>3</sup> / <sub>16</sub> " 30mm	
8930/BR/106	43/8" 112mm	1½" 38mm	

### **Hatch & Skylight Fasteners**

Part No.	Bolt Size	Base Plate	
8784/BR	2" x 5%" 50 x 8mm	1%" x ¾" 47 x 20mm	

### **Holding Down Bolt**

Part No.	Bolt Size	Fork Base Plate
8789/BR/075	3" x 3/8" 75 x 10mm	2½" x ¾" 60 x 19mm
8789/BR/150	6" x <sup>7</sup> /16" 150 x 11mm	1¾" x 1¾" 44 x 44mm

#### **Table Screws**

Brass	Plates	Screws	
8786/BR	Rectangle 1 <sup>7</sup> / <sub>16</sub> " x <sup>15</sup> / <sub>16</sub> " 36 x 25mm	Thumbscrew 3" x 3/8" 75 x 10mm	
8787/BR	Round Diameter 2" 50mm	Screw Eye 3" x 3/8" 75 x 10mm	

### **Brass Hooks**

	Single		Double	Compact
Height	1½" 38mm	2" 50mm	2½" 60mm	Projects 3/4" 20mm
Brass	8260/BR/037	8260/BR/050	8262/BR	0691/BR
Chrome	8260/CP/037	8260/CP/050	8262/CP	0691/CP

## **Folding Coat Hook**

Brass	Туре	Height O.A.	Projection (in use)	Projection (folded)
8302/BR	3-Arm	3" 75mm	3¾" 85mm	<sup>3</sup> / <sub>4</sub> " 19mm
8303/BR	4-Arm	4¾" 122mm	51/8" 128mm	<sup>3</sup> / <sub>4</sub> " 19mm



### **Flush Rings**

These flush rings are high quality in all brass with a generous recess to allow fingers access to the rings.



## **Rectangular with Catch**

Brass	Chrome	Length
8480/BR/050	8480/CP/050	2" x 1½" 50 x 38mm



#### Rectangular

Brass	Chrome	Length
8500/BR/037	8500/CP/037	1%6" x 1%6" 40 x 30mm
8500/BR/044	8500/CP/044	1 <sup>13</sup> / <sub>16</sub> " x 1 <sup>15</sup> / <sub>16</sub> " 46 x 34mm
8500/BR/050	8500/CP/050	2" x 1½" 50 x 38mm
8500/BR/069	8500/CP/069	2¾" x 1½" 70 x 48mm
8500/BR/075	8500/CP/075	3" x 2½" 75 x 64mm

#### Round

Brass	Chrome	Length
8502/BR/037	8502/CP/037	1½" 38mm
8502/BR/044	8502/CP/044	1¾" 45mm
8502/BR/050	8502/CP/050	2" 50
8502/BR/062	8502/CP/062	1½" 67mm



#### **Heavy Duty Lifting Ring with Catch**

Heavy duty brass fitting, which can be operated with two or more fingers from the outside. Also fitted with removable inner handle.

Brass Chrome		Plate Dimensions	
8481/BR	8481/CP	4" x 31/8"	98 x 80mm



# **Heavy Duty Lifting Ring without Catch**

Flush brass fitting enabling two or more fingers to be used for heavier hatches.

Brass	Chrome	Din	nensions
8482/BR	8482/CP	3" x 2"	75 x 55mm



#### **Brass Drop Rings**

All brass construction.

Brass	Dimensions	
8520/BR/075	3" x 5/8"	75 x16mm



### **Brass Drop Ring - Forged**

A high load fitting with a deep section forged housing and large forged ring for extra strength and ease of use. In polished brass or chrome plated.

Brass	Chrome	<b>Housing Dimensions</b>	Ring Inside Diameter
8525/BR	8525/CP	2 <sup>3</sup> / <sub>4</sub> " x 1" 70 x 25mm	1" 25mm





9111 9114

# Flush Sliding Door Pull

Cast polished brass or chrome plated in two styles. The 9114 can also be used as a drawer pull.

Brass	Chrome	Width	Length
9111/BR/075	9111/CP/075	15/8" 42mm	3" 76mm
9111/BR/100	9111/CP/100	2" 50mm	4" 100mm
9114/BR/075	9114/CP/075	1¾" 43mm	3" 76mm
9114/BR/100	9114/CP/100	1%" 48mm	4" 100mm







All brass construction with polished finish. Chrome available to order.

Brass	Dimensions	
9113/BR/075	3" x 11/8"	75 x 47mm
9113/BR/087	3½" x 2"	89 x 50mm



#### **Drawer Pull**

A lightweight drawer pull in pressed brass, polished or chrome plated.

Brass	Chrome	Dimensions
9110/BR	9110/CP	3¾" x 1¾" 95 x 45mm



#### **Drawer Pull**

Cast brass drawer pull in polished brass finish or chrome plated.

Brass	Chrome	Dimensions
9112/BR	9112/CP	3 <sup>3</sup> / <sub>4</sub> " x 1 <sup>1</sup> / <sub>2</sub> " 95 x 38mm



#### Sash or Door Handles

Cast brass with a polished finish. Can be chrome plated to order.

Brass	Length	Projection	
9121/BR/070	2¾" 70mm	<sup>13</sup> / <sub>16</sub> " 22mm	
9121/BR/140	5½" 140mm	11/8" 29mm	



#### **Canted Brass Handle**

Cast in brass and then polished. Also available chrome plated.



Brass	I	Length	Pro	jection
9122/BR	6"	150mm	13/8"	35mm
9122/CP				

#### **Barrel Bolts**

Solid brass extrusions in straight and cranked patterns, supplied polished or chrome plated.



## **Straight Pattern**

Brass	Chrome	Le	ngth
9011/BR/050	9011/CP/050	2"	50mm
9011/BR/062	9011/CP/062	2½"	64mm
9011/BR/075	9011/CP/075	3"	75mm
9011/BR/100	9011/CP/100	4"	100mm
9011/BR/150	-	6"	150mm



#### **Cranked Pattern**

Brass	Chrome	L	ength
9012/BR/075	9012/CP/075	3"	75mm
9012/BR/100	9012/CP/100	4"	100mm

#### **Cabin Hooks**

Silent pattern in brass or chrome plate finish. Standard pattern also available.



#### Silent Pattern

Brass	Chrome	Le	ngth
8802/BR/062	8802/CP/062	2½"	62mm
8802/BR/075	8802/CP/075	3"	75mm
8802/BR/100	8802/CP/100	4"	100mm
8802/BR/125	8802/CP/125	5"	125mm
8802/BR/150	8802/CP/150	6"	150mm
8802/BR/200	8802/CP/200	8"	200mm



### Hinges

All of our extensive range of hinges are cast or extruded in brass or gunmetal and fitted with pins of the same material. Most items can be chrome plated to special order.

### **Brass Butt Hinges**

Extruded brass with brass pin. Satin finish.



Brass Butt	Size		
	Length x	Width (open)	
8971/BR/025	1" x 5/8"	25 x 16mm	
8971/BR/037	1½" x 1/8"	38 x 22mm	
8971/BR/044	1¾" x 1"	44 x 25mm	
8971/BR/050	2" x 11/8"	51 x 29mm	
8971/BR/062	2½" x 1¾"	64 x 35mm	
8971/BR/075	3" x 15%"	76 x 41mm	
8971/BR/100	4" x 23/8"	102 x 60mm	

#### **Brass Back Flap**

Extruded brass with brass pin. Satin finish.



Brass	Size
Back Flap	Length x
	Width (open)
8976/BR/031	1 <sup>1</sup> / <sub>4</sub> " x 1 <sup>7</sup> / <sub>8</sub> "
	32 x 48mm
8976/BR/037	1½" x 2¾"
	38 x 60mm
8976/BR/050	2" x 3"
	51 x 76mm
8976/BR/062	2½" x 4"
	64 x 102mm

### **Brass Lift-Off Hinges**

Extruded brass with brass pin. Satin finish. The hand is determined by which half retains the pin.



Left Hand	Right Hand	Size
		Length x
		Width (open)
8975/BR/LH/050	8975/BR/RH/050	2" x 11/8"
		51 x 29mm
8975/BR/LH/062	8975/BR/RH/062	2½" x 1¾"
		64 x 35mm
8975/BR/LH/075	8975/BR/RH/075	3 x 15/8"
		76 x 41mm

#### **Counter Flap Hinge**

Extruded brass with brass pin. Polished finish.



Counter Flap	Size
	Length x Width
	(open)
8979/BR/025	1 x 3"
	25 x 75mm
8979/BR/031	1¼ x 4"
	32 x 100mm
8979/BR/037	1½ x 4½"
	38 x 115mm

# **Fancy Hinge**

Pressed brass with brass pin and polished finish.



Brass	Chrome	Size
		Length x Width
		(open)
8977/BR/031	8977/CP/031	1½ x 2½"
		38 x 66mm

#### **Continuous Hinge**

Supplied in self colour brass with steel pin. 72" (1829mm) length.



Brass	Width Open		Hole	Centres
8978/BR/025	1"	25mm	23/8"	60mm
8978/BR/032	11/4"	32mm		




# **Hook & Ride Hinges**

Traditional style lift-off hinges cast in brass with a polished finish. When fitting to companionway doors, or similar applications, one straight and one curved hinge is used per door. The curved hinges are handed (left hand illustrated) and the straight ones are universal.



Straight	Curved Left	Curved Right	Pintle Plate	Strap
				Length
8871/BR/100	8872/BR/LH/100	8872/BR/RH/100	1½" x ¾" 38 x 19mm	4" 100mm
8871/BR/150	8872/BR/LH/150	8872/BR/RH/150	2½" x 1" 56 x 25mm	6" 150mm





#### **Tee Hinge**

Heavy duty cast brass hinges with a polished finish.

Brass	Din	ension A	Dim	ension C	Strap	Width
8875/BR/150	6"	150mm	4"	100mm	13/4"	44mm
8875/BR/200	8"	200mm	5"	125mm	2"	50mm
8875/BR/250	10"	250mm	51/2"	140mm	21/2"	64mm

#### **Strap Hinge**

Heavy duty cast brass strap hinge with a polished finish.

Brass	Length Overall		Width	
8870/BR/200	8"	200mm	13/8"	35mm
8870/BR/250	95/8"	245mm	1½"	38mm
8870/BR/300	113/4"	298mm	13/8"	35mm



# **Single Tail Hinge**

Cast in gunmetal and polished. Also available in chrome.

Gunmetal	Chrome	Length Overall	Width	
8879/GM	8879/CP	6" 150mm	1¼" 32mm	



#### **Skylight Hinge**

Cast in gunmetal with a polished finish. Centre section is curved to suit skylight frame.

Gunmetal	Length	Length	Length	Width
	Overall	Centre Section	of Straps	
8874/GM/320	12½"	3"	43/4"	1½"
	318mm	75mm	120mm	38mm
8874/GM/430	16¾"	3½"	6½"	1½"
	425mm	90mm	165mm	38mm



# **Hatch Hinges**

Two sizes and patterns of hinges with raised straps to suit hatches. Cast in brass, they are also available chrome plated.

Brass	Strap Length		Base Width		Clearance Under	
					S	trap
0820/BR	5½"	140mm	23/8"	60mm	13/8"	35mm
0821/BR	33/4"	95mm	23/8"	60mm	1/4"	7mm



# **Locker & Strap Hinges**

Light duty hinges die cast in brass. Also available in chrome.

Brass	Length		V	Vidth
0833/BR	31/8"	98mm	1"	25mm
0831/BR	33/4"	95mm	21/4"	57mm
0823/BR	4"	103mm	11/4"	32mm



# **Separating Hinges**

Bronze hinges of high strength that can be separated and reconnected easily by simply pulling a spring loaded pin. Acting as both hinge and catch, they are ideal for hatches, engine covers, lockers etc. Supplied in pairs.

Available in matt finish or chrome.

Bronze	Chrome	Width	Length	
0840/MB	0840/CP	2" 54mm	2" 54mm	



**NEW** 



8749/BR/178

# **Door, Hatch & Interior Fittings**

### Hatch, Skylight & Window Stays

From this group of products it should be possible to select a fitting that will support any kind of opening flap on the boat, be it horizontal, vertical or something in between. All are constructed in brass, with most also available in chrome finish.



8749/BR/294



8747/BR





Brass	Chrome		Length		. Travel
8749/BR/178	8749/CP/178	7½"	190mm	5½"	140mm
8749/BR/294	8749/CP/294	12"	300mm	9"	230mm
8747/BR/400	-	16"	400mm	14½"	368mm
8747/BR/525	-	21½"	545mm	19"	483mm
8743/BR/250	-	10"	250mm	8"	200mm
8743/BR/350	-	14"	350mm	12"	300mm
8748/BR/MIN	8748/CP/MIN	93/4"	247mm	53/4"	145mm
8748/BR/287	8748/CP/287	113/4"	300mm	8"	200mm

# **Self Gripping Door Stop**

8748/CP/353

Cast in brass with a rubber buffer, the hook automatically holds the door in the open position. Available in brass and chrome.

368mm

11"

280mm

141/2"



8748/BR/353

Brass	Chrome	Base Diameter		Projection	
8806/BR/40	8806/CP/40	1%16"	40mm	13/4"	45mm
8806/BR/50	8806/CP/50	2"	50mm	25/8"	65mm
Heavy Duty					
8807/BR/58	8807/CP/58	21/4"	58mm	3"	75mm

# **Spring Door Holder**

Spring loaded jaws catch and hold the stem to secure the door in the open position. Available in brass or chrome finish.

Brass	Chrome Base Size		Size
3165/BR	3165/CP	23/8" x 1/2"	60 x 12mm



#### **Toilet Roll Holder**

Traditional style fitting with polished cast gunmetal bracket and wooden roller. It can also be supplied chrome plated.

	Gunmetal	Chrome	Over	all Width	Over	all Height
Ī	8045/GM	8045/CP	6"	150mm	5"	125mm



#### **Ventilators**

We list a range of brass ventilators for various applications on the boat from simple air flow to heating grills and covers for deck vents. All are also available chrome plated and in stainless steel to special order.



#### **Round Hit & Miss - Slide Action**

A new style of round vent with slide control

Diameter	Brass	Chrome	SS
4" 100mm	8540/BR/100	8540/CP/100	8540/SS/100
5" 127mm	8540/BR/127	8540/CP/127	8540/SS/127



#### **Round Hit & Miss**

Brass	Diameter	
8541/BR/094	3¾"	
	95mm	
8541/BR/125	5"	
	125mm	



#### **Round Grill**

Heavy cast brass and polished.

Brass	Diameter
8543/BR/159	61/4"
	160mm





Hit & Miss

Brass	Size		
8542/BR/150/075	6" x 3"	150 x 75mm	
8542/BR/150/150	6" x 6"	150 x 150mm	
8542/BR/225/075	9" x 3"	228 x 75mm	
8542/BR/225/150	9" x 6"	228 x 150mm	
8542/BR/305/075	12" x 3"	305 x 75mm	

#### Louvre


Brass	Size		
8547/BR/150/075	6" x 3"	150 x 75mm	
8547/BR/150/150	6" x 6"	150 x 150mm	
8547/BR/150/225	6" x 9"	150 x 225mm	
8547/BR/225/075	9" x 3"	225 x 75mm	
8547/BR/225/150	9" x 6"	225 x 150mm	
8547/BR/225/225	9" x 9"	225 x 225mm	
8547/BR/305/075	12" x 3"	305 x 75mm	
8547/BR/305/150	12" x 6"	305 x 150mm	
8547/BR/305/225	12" x 9"	305 x 225mm	
8547/BR/305/305	12" x 12"	305 x 305mm	







**Oblong Slot** 



Brass	Size		
8548/BR/150/075	6" x 3"	150 x 75mm	
8548/BR/225/075	9" x 3"	228 x 75mm	
8548/BR/225/150	9" x 6"	228 x 150mm	
8548/BR/303/075	12" x 3"	305 x 75mm	

**Square Hole** 




Brass		Size
8549/BR/150/075	6" x 3"	150 x 75mm
8549/BR/225/075	9" x 3"	228 x 75mm
8549/BR/225/150	9" x 6"	228 x 150mm



### **Tools**





#### **Speedy Stitcher**

This very useful tool is basically a hand operated sewing machine, and is suitable for most fabrics and leather. It is supplied with a bobbin of waxed thread, one bent needle and one straight one and full instructions. Sold singularly, they are available in a display box of 6.

Part No.	Item
1501	Speedy Stitcher complete
1502	Straight Needle
1503	Fine Needle
1504	Curved Needle
1505	Spare Bobbin
1506	Waxed Thread-Heavy
1507	Waxed Thread-Light

#### **Leather Sailmakers Palms**

Daveys seaming palms are available in three qualities, 'best' and 'store', with a tied back, or lightweight, with an adjustable buckle. Roping palms, with extended thumb guard, come in 'best' and 'store' quality. All palms, except the lightweight versions, are lined with hide. Available in left or right hand.



Left hand	Right hand	Туре
3050/00/BU/LH	3050/00/BU/RH Seaming, lightweight	
3050/00/ST/LH	3050/00/ST/RH	Seaming, store quality
3050/00/LH/B	3050/00/RH/B Seaming, best	
3051/00/ST/LH	3051/00/ST/RH	Roping, store quality
3051/00/B/LH	3051/00/B/RH	Roping, best

# Sailmakers Needles-Reduced Edge

Best forged cast steel sailmakers needles, with proven triangular section, that are easy to use and will not damage the cloth. Packed in either 25 of a size or in an assortment of 5 or 20 needles.



Part No.	Size-SWG		Part No.	Size-SWG	
3053/00/12	12		3053/00/15	15	
3053/00/13	13		3053/00/16	16	
3053/00/14	14		3053/00/17	17	
3055/00/05	5-assorted needles. 13 to 19				
3055/00/10	10-assorted needles. 14 to 18				
3055/00/20	20-assorted ne	20-assorted needles 14 to 18, plus 2 sewing needles.			





For waterproofing thread and repairs. 35 gram cakes. Part No. 2036

# **Marlin Spikes**

Best steel pointed spikes with black grip and hole.

Part No.	L	ength	Part No.	L	ength
1482/00/150	6"	150mm	1482/00/350	14"	350mm
1482/00/200	8"	200mm	1482/00/400	16"	400mm
1482/00/250	10"	250mm	1482/00/450	18"	450mm
1482/00/300	12"	300mm			





Stainless steel hollow spike with wooden handle.

**2478/SS/170** 6<sup>3</sup>/<sub>4</sub>" (170mm) long. **2478/SS/285** 11<sup>1</sup>/<sub>4</sub>" (285mm) long.

# **Tools**



#### **Knives**

A range of high quality knives made in the heart of England's steel city of Sheffield.



#### **Green River Knife**

With 5" (125mm) carbon steel blade, hardwood handle and leather sheath.

Part No. 1500



#### **Heavy Duty Riggers Knife**

With a thick carbon steel 5½" (140mm) long blade and shaped hardwood handle.

Part No. 1491



#### 2-Piece Yachtsman's Kit

Stainless steel knife and marlin spike shackle key. Complete with leather sheath.

Part No. 1487



#### Lockspike Captain's Knife

A heavy duty, traditionally made, stainless steel pocket knife with a 60mm blade and lockable spike, large capacity shackle key (for pin heads up to 9mm), bottle opener and white cotton lanyard.

**Part No. 1488** 

### **Caulking Irons - Hand Forged**

We have a range of carbon steel caulking irons, which are light and comfortable to hold for long periods. A variety of sizes are available to suit the required seam widths.



Part	Туре	Seam	Part	Type	Seam
No.		Width	No.		Width
1561	Sharp Straight	-	1566	Single Crease	3 - 4mm
1562	Sharp Bent	-	1567	Single Crease	4 - 5mm
1565	Single Crease	2mm	1568	Single crease	6 - 7mm



#### **Caulking Mallet**


Made from hard wood, this is the ideal mallet for use with the above caulking irons. Head length  $10\frac{1}{2}$ " (270mm).

**Part No. 0946** 



#### **Scrapers**

A range of strong, general purpose scrapers.



Part No.	Туре	Length	Blade
			Width
1460	Bent	12" 300mm	27/8"
			70mm
1462	Straight c/w	Blade - 12" 300mm	27/8"
	Wooden Handle	Handle - 12" 300mm	70mm
1463	Dry Dock Scraper	9" 230mm	7"
			175mm



### **Chipping Hammer**

Chipping hammer, 1lb (500grams) with 12" (300mm) wooden handle. **Part No. 2710** 



# Signal, Sound & Safety



#### **Electric Horn**

**NEW** 



This horn is of all brass construction with a spun body and trumpet complemented with brass fastenings and bracket. Available in polished finish or chrome plated. 12v or 24v.

	12 Volt	24 Volt	Diameter	Length
Brass	2010/BR/12	2010/BR/24	43/8"	6"
Chrome	2010/CP/12	2010/CP/24	117mm	150mm



#### **Ships Bells**

Polished brass bells and brackets made in England.

Part No.	Mouth Diameter
2028/BR/100	4" 100mm
2028/BR/150	6" 150mm
2028/BR/200	8" 200mm



### **Inglefield Pattern Flag Clips**

Available in light and Admiralty pattern. Stamped brass.

Part No.	Type	Length		
3430/BR/AP	Admiralty Pattern	3½" 90mm		
3430/BR/LP	Light Pattern	2½" 65mm		



#### **Flags**

We are able to supply good quality code flags, ensigns and courtesy flag for most countries. Prices on application.



#### **Sounding Leads**

Lead casting with brass thimble and hollow base for tallow. 4lb size also available in polished bronze.

Lead	Weight
3070/00/02	2lb 0.9kg
3070/00/04	4lb 1.8kg
3070/00/07	7lb 3.1kg
3070/00/14	14lb 6.2kg
Bronze	
3070/GM/04	4lb 0.9kg

#### **Tallow**

Part No.	Weight
2810/00/02	8oz
	250grms
2810/00/05	11lbs
	5kg

# **Fastenings**





#### **Wood Screws**

We stock a wide range of wood screws in silicon bronze to suit the fittings in this catalogue. Supplied in boxes of 100. Other sizes are available to special order.

Wood screws are made to the screw gauge, where the lowest number is the thinnest screw (unlike nails where it is the opposite). The table below gives the approximate metric equivalent size.

Screw Gauge	4	6	8	10	12	14	16	18
mm	2.74	3.45	4.17	4.88	5.59	6.30	7.01	7.72

#### **Silicon Bronze**

Suitable for all gunmetal fittings, above and below the waterline.

L	ength	6 Gauge	8 Gauge	10 Gauge	12 Gauge	14 Gauge
3/4"	19mm	3470/SB/019/006	3470/SB/019/008	-	-	-
1"	25mm	3470/SB/025/006	3470/SB/025/008	3470/SB/025/010	3470/SB/025/012	-
11/4"	31mm	3470/SB/031/006	3470/SB/031/008	3470/SB/031/010	3470/SB/031/012	-
1½"	37mm	-	3470/SB/037/008	3470/SB/037/010	3470/SB/037/012	-
13/4"	44mm	-	-	3470/SB/044/010	3470/SB/044/012	-
2"	50mm	-	-	3470/SB/050/010	3470/SB/050/012	3470/SB/050/014
21/2"	62mm	-	-	3470/SB/062/010	3470/SB/062/012	3470/SB/062/014
3"	75mm	-	-	-	-	3470/SB/075/014



### **Silicon Bronze Machine Screws**

Ideal fastenings for exterior gunmetal fittings. Nuts & washers must be ordered separately. UNC thread.

L	ength	<sup>3</sup> / <sub>16</sub> " 5mm	½" 6mm	<sup>5</sup> / <sub>16</sub> '' 8mm	3/8" 10mm
2"	50mm	3458/SB/050/005	3458/SB/050/006	3458/SB/050/008	-
21/2"	62mm	3458/SB/062/005	3458/SB/062/006	3458/SB/062/008	3458/SB/062/010
3"	75mm	-	3458/SB/075/006	3458/SB/075/008	3458/SB/075/010
31/2"	87mm	-	3458/SB/087/006	-	-
4"	100mm	-	3458/SB/100/006	3458/SB/100/008	3458/SB/100/010
6"	150mm	-	-	-	3458/SB/150/010

Other sizes can be obtained to special order.



#### **Silicon Bronze Coach Bolts**

Nuts & washers must be ordered separately. UNC thread.

Le	ength	<sup>3</sup> / <sub>8</sub> '' 10mm	½'' 12mm
4"	100mm	3452/SB/100/010	3452/SB/100/012
5"	125mm	3452/SB/125/010	-
6"	150mm	3452/SB/150/010	3452/SB/150/012
7"	175mm	3452/SB/175/010	-
9"	225mm	3452/SB/225/010	-
10"	250mm	-	3452/SB/250/012

Other sizes can be obtained to special order.





#### Silicon Bronze Nuts & Washers. UNC thread.

	Size	Nuts	Washers
3/16"	5mm	3459/SB/005	3460/SB/005
1/4"	6mm	3459/SB/006	3460/SB/006
5/16"	8mm	3459/SB/008	3460/SB/008
3/8"	10mm	3459/SB/010	3460/SB/010
1/2"	12mm	3459/SB/012	3460/SB/012



# **Fastenings**



## **Copper Boat Nails & Roves**

We have an extensive range of copper nails in both countersunk head and rose head, together with a complementary range of copper roves. All items are packed in boxes of 1 kilo and we show the approximate quantity per box. Other sizes are available to special order, in minimum quantities of 10 kilos.

Copper nails are manufactured to the wire gauge, where the highest number is the thinnest nail. We list below the range of gauges that we supply with the approximate equivalent size in millimetres, which is measured across the flats.

Wire Gauge	mm	Wire Gauge	mm	Wire Gauge	mm
16g	1.65	11g	3.00	7g	4.50
14g	2.00	10g	3.35	6g	5.00
13G	2.36	9g	3.75	4g	6.00
12g	2.65	8g	4.00		

## **Copper Boat Nails-Countersunk Head**

Length		14 Gauge	13 Gauge	12 Gauge	11 Gauge
5/8" 16mm		-	-	-	-
Quant					
<sup>3</sup> / <sub>4</sub> " 19mm		5071/CO/019/014	-	-	-
Quant.		1390			
1" 25mm		5071/CO/025/014	5071/CO/025/013	5071/CO/025/012	-
Quant.		1041	815	603	
1½" 32mm	-	5071/CO/031/014	5071/CO/031/013	5071/CO/031/012	-
Quant.		833	629	483	
1½" 38mm	-	5071/CO/037/014	5071/CO/037/013	5071/CO/037/012	5071/CO/037/011
Quant.		694	524	402	307
1¾" 44mm	-	-	5071/CO/044/013	5071/CO/044/012	5071/CO/044/011
Quant.			449	345	263
2" 50mm	-	-	-	5071/CO/050/012	5071/CO/050/011
Quant.				301	230
2½" 56mm	-	-	-	5071/CO/056/012	5071/CO/056/011
Quant.				267	204
2½" 62mm	-	-	-	5071/CO/062/012	5071/CO/062/011
Quant.				241	183
3" 75mm	-	-	-	-	5071/CO/075/011
Quant.					154


		10 Gauge	9 Gauge	8 Gauge	6 Gauge
11/2"	37mm	5071/CO/037/010	-	-	-
	Quant.	242			
2"	50mm	5071/CO/050/010	5071/CO/050/009	-	-
	Quant.	182	151		
21/4"	56mm		5071/CO/056/009	-	-
	Quant.		135		
21/2"	62mm	5071/CO/062/010	5071/CO/062/009	5071/CO/062/008	-
	Quant.	145	120	101	
3"	75mm	5071/CO/075/010	5071/CO/075/009	5071/CO/075/008	-
	Quant	122	101	84	
31/2"	87mm	5071/CO/087/010		5071/CO/087/008	-
	Quant.	104		72	
4"	100mm	5071/CO/100/010	-	5071/CO/100/008	5071/CO/100/006
	Quant.	91		63	45
5"	125mm	-	-	5071/CO/125/008	5071/CO/125/006
Quant.				51	37
6"	150mm	-	-	-	5071/CO/150/006
	Quant.				31



# **Fastenings**






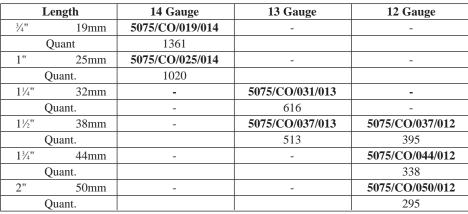

		11 Gauge	10 Gauge	8 Gauge
2"	50mm	5075/CO/050/011	5075/CO/050/010	
Q	uant.	225	176	
21/2"	62mm	-	5075/CO/062/010	-
Q	uant.		142	
3"	75mm	-	5075/CO/075/010	5075/CO/075/008
Quant.			120	82
31/2"	87mm	-	-	5075/CO/087/008
Quant.				70
4"	100mm	-	-	5075/CO/100/008
Quant.				61

# **Copper Roves**


Supplied in boxes of ½ kilo with approximate quantity per ½ kilo shown.



Part No.	Rove	Diameter	Nail Gauge	Quant. per ½ kilo
5072/CO/008	5/16"	8mm	14g	1150
5072/CO/010	3/8"	10mm	13g	700
5072/CO/011	7/16"	11mm	12g	470
5072/CO/012	1/2"	12mm	10g & 11g	340
5072/CO/014	9/16"	14mm	9g	250
5072/CO/016	5/8"	16mm	7g & 8g	190
5072/CO/019	3/4"	19mm	6g	130

#### **Rove Punch**

An essential tool for neat copper nail & rove work.





	Longth	Course	Approx. Quantity	
	Length	Gauge	Per Kg	Per Box
5061/GA/050	2" 50mm	<sup>3</sup> / <sub>16</sub> " 5mm	112	2800
5061/GA/065	2½" 65mm	<sup>3</sup> / <sub>16</sub> " 5mm	98	2450
5061/GA/075	3" 75mm	½" 6mm	48	1200
5061/GA/090	3½" 90mm	½" 6mm	38	950
5061/GA/100	4" 100mm	½" 6mm	34	850
5061/GA/115	4½" 115mm	5/16" 8mm	20	500
5061/GA/125	5" 125mm	5/16" 8mm	18	450
5061/GA/150	6" 150mm	3/8" 10mm	10	250
5061/GA/175	7" 175mm	3/8" 10mm	9	225
5061/GA/200	8" 200mm	3/8" 10mm	6	150

# **Boat Care**





#### Jeffery's No.2 Black Marine Glue

This traditional product, now owned by Davey & Company, has been the premier choice for traditional deck seaming around the world for decades.

Still produced in England from the original formula, it is as reliable today as throughout the last century. It will adhere tenaciously to the seam for many years, remaining flexible in low temperatures and withstanding softening at high temperatures.

To apply, once carefully heated to a working temperature of around 370 degrees F (190 degrees C) it can be poured onto the prepared seams. Two applications are needed to ensure that all steam and air are released. Average usage 1kg to 10 metre run.

**Part No. 5025/00/0125** 12.5 kg (27½ lbs) **Part No. 5025/00/025** 25.0 kg (55 lbs)



#### Oakum

Best navy oakum steeped in Stockholm Tar. Generally used for caulking below the waterline, due to its high durability.

**Part No. 1569/00/04** 4 kg coil **Part No. 1569/00/12** 12 kg bale



#### **Caulking Cotton**

Soft, top quality caulking cotton made up of 8 strands totalling an uncompressed diameter of approximately  $\frac{5}{16}$ " (8mm). Supplied in balls of  $\frac{1}{2}$  kilo.

Part No. 1570



#### **Red Lead Powder**

A bright orange powder with strong preservative properties. When mixed with linseed-oil putty it make 'red lead putty' for use as stopping in seams below the waterline on wooden craft.

An appropriate ratio of 16 parts putty to 1 part red lead powder is about the right proportions, with linseed oil added to modify the mixture to the required consistency.

**Part No. 5049/00/001** 1 kg. tub **Part No. 5049/00/025** 25 kg. bag

## **Boat Care**





#### **Daveyshine**

A high performance metal cleaner and polish ideally suited to bronze, brass, copper, stainless steel, aluminium, chrome and other marine metals. Its smooth paste formula is easy to apply accurately and when removed leaves a shiny surface and protective film, which delays re-tarnishing. Even heavily tarnished fittings can be restored. The handy 170 gram tub is long lasting as Daveyshine is used sparingly and the wide tub opening allows every last gram to be used.

#### **Key Features:**

- Cleans and polishes in one product
- Leaves protective coating
- Non-toxic, non-abrasive, non-inflammable
- No harsh acids, caustics or abrasives
   Part No. 5010/00/170
- Low allergic risk
- Non spill formula & tub
- Also excellent for restoring fibreglass, plexiglass, eisenglass and lexan.



#### Lanoguard

Lanoguard is an all-purpose anti-corrosive, lubricant and water proofing agent that delivers superb results in a wide variety of applications. It can be used on metals, leather, plastics and other materials such as fibreglass.

Its principal ingredient is lanolin (wool grease), a natural oil that has been used throughout the centuries for the protection of weapons, leather and marine equipment. The combination of natural lanolin and today's technology makes Lanoguard's uses almost limitless.

#### **Key Features:**

- Tenacious lubricant
- Rust inhibitor/anti-seize
- Long lasting protector
- Non conductive
- Outstanding waterproofing
- Safe for leather, vinyl and rubber
- Environmentally friendly
- Non toxic and non carcinogenic



 Part No. 5055/OO/025
 250ml Grease

 Part No. 5055/OO/060
 600ml Grease

 Part No. 5057/OO/050
 500ml Liquid Spray

 Part No. 5057/OO/200
 2 Litre Liquid Spray



#### Stockholm Tar

A strongly preservative thick liquid used to preserve natural cordage and timber. Traditionally used to coat servings on rigging and is the substance added to oakum to stop it rotting. Worth having for the wonderful smell alone.

Part No. 2809/00/01 1 kg tub Part No. 2809/00/03 3 kg tub Part No. 2809/00/05 5 kg tub



# Index

A		Copper nails & roves	64 & 65
Anti rattle fasteners	52	Cowl ventilators	10 & 11
Art deco lights	44	Custom Work	5
Ash blocks	32 to 35		
	5_ 10 00	D	
В		Daveyshine	67
Back stay levers	28	Deck filling plates	11
Bar cleats	13	Deck head lights	43
Barrel bolts	55	Deck plates - threaded	21
Beeswax	60	Deck Prisms	8 & 9
Belaying pins	30	Deck screws	11
Bells	62	Door & drawer pulls	54 & 55
Berth lights	42	Door catches	52
Bilge pumps	41	Door furniture	51
Binnacle rings	20	Door holders	58
Black marine glue	66	Door locks	50
Blocks	32 to 39	Down lighters	45
Boarding ladder fittings	26	Drain plugs	11
Boat badge	27	Drip cup	7
Boat nails - copper	64 & 65	Drop rings	54
Boat nails - galvanised	65		
Boathooks & staves	27	E	
Bollards	14 & 15	Engine control levers	19
Boom crutch sockets	23	Eye bolts	20 & 21
Boom end fittings	29		
Bow eye	20	F	
Bowsprit plates	29	Fairleads	16 to 19
Bronze blocks	35	Faucets	41
Bronze shackles	30	Fender eye plates	19
Bronze stanchions	26	Fids	60
Bronze stars	23	Flag clips	62
		Flag staff sockets	23
С		Flue pipe & fittings	40
Cabin hooks	55	Flush rings	54
Cam cleats	38	Fly screens	7
Captive rowlocks	25	Fuel tank vents	11
Cauling irons	61	Furling gear	28
Caulking cotton	66		
Centre board winch	27	G	
Chain pipes	24	Gaff span shackles	30
Chain plates	29	Galileiglass	49
Cleats	12 & 13	Galley pumps	41
Clew fittings	29	Galvanised nails	65
Coach bolts	63	Gimbal lamps	46 & 49
Coaming leads	18	Glazed ventilator	10
Coat hooks	53	Globe lamp	46

# Index



	0.0		4-
Goosenecks	28	Mast lights	45
'Grabit' boathook	27	Metal cleaner/polish	67
Grills	59	Mortice locks	50
Guarded lights	44	Mushroom ventilators	10
Н		N	
Half band & spikes	28	Nails	64 & 65
Handrail stanchions	26	Navigation lamps	47
Hasp & staples	53	Needles	60
Hatch fasteners	53	Night vision lights	43
Hatch stays	58		
Highfield levers	28	0	
Hinges	56 & 57	Oakum	66
Hit & miss vents	59	Oar clamp	24
Holding down bolts	53	Oarlocks	25
Horns	62	Oil lamps	46, 47 & 49
Hot Pot stove	40		
Hurricane lamps	46	Р	
		Pad eyes	20
1		Parrel beads	29
Inglefield clips	62	Pelican hook	30
Interior lights	42, 43 & 49	Portlights	6
		Prisms - deck	8 & 9
J		Pulley blocks	32 to 39
Jeffery's glue	66	Pumps	41
'Jelly mould' lights	43		
		R	
K		Rail hinge	26
Keel band - brass	19	Red lead powder	66
Knives	61	Reefing claw	29
		Riggers knife	61
L		Rim locks	51
Lacing hooks & eyes	19	Ring bolts	20 & 21
Ladder fittings	26	Roof lights	43
Lanoguard	67	Rowlocks & sockets	25
LED's	48	Rubbing band - brass	19
Lifting rings	54	Rudder gear	22
Locks	50 & 51	-	
Louvre vents	59	S	
		Sail track & slides	31
M		Sailmakers palms	60
Machine screws	63	Scrapers	61
Mains voltage lights	45	Screw eyes	21
Marlin spikes	60	Screws	63
Mast bands	29	Shackle plates	20
Mast hoops	28	Shackles	30



# Index

Sheaves	33 & 38	Т	
Sheet leads	18	Table screws	53
Shell vents	10	Tackle hooks	33
Shroud plates	29	Tallow	62
Skylight lifts	58	Teak blocks	35
Sliding gooseneck	28	Tiller fittings	23
Slip bolts	55	Toggle fasteners	52
Snap shackles	30	Toilet roll holder	58
Snubbing winch	38	Track	31
Solid fuel stove	40	Tufnol cleats	13
Sounding leads	62	Tufnol type blocks	36 to 39
Speedy stitcher	60	Ventilators	10,11 & 59
Spinnaker pole fittings	31		
Stainless steel blocks	39	W	
Stanchion eyebolt	20	Weatherproof lights	44
Stanchions & bases	26	Windscreen fittings	6
Stand-up kits	33	Wire rope blocks	38 & 39
Stars	23	Wood screws	63
Stemhead fittings	24	Wooden blocks	32 to 35
Stemhead rollers	24	Wooden cleats	13
Step light	45	Wykeham Martin furling gear	28
Stockholm tar	67		
Storm glass	49	Υ	
		Yachtsmans kit	61



Davey & Company, London, Ltd Unit 1, Commerce Way, Whitehall Road Industrial Estate, Colchester, Essex CO2 8HR

> TEL: +44(0)1206 500945 FAX: +44(0)1206 500949

Email: chandlery@davey.co.uk www.davey.co.uk